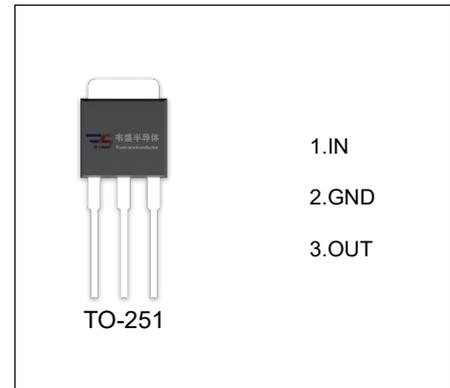


VS78M06 Three-terminal positive voltage regulator

FEATURES

- Maximum output current
 I_{OM} : 0.5 A
- Output voltage
 V_O : 6V
- Continuous total dissipation
 P_D : 1.25 W ($T_a = 25^\circ\text{C}$)



ABSOLUTE MAXIMUM RATINGS (Operating temperature range applies unless otherwise specified)

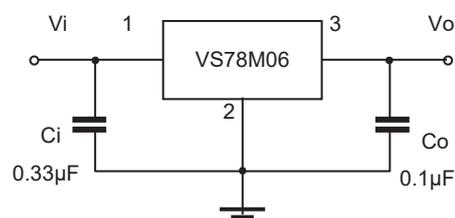
Parameter	Symbol	Value	Unit
Input Voltage	V_i	35	V
Thermal Resistance from Junction to Ambient	$R_{\theta JA}$	80	$^\circ\text{C}/\text{W}$
Operating Junction Temperature Range	T_{OPR}	-40~+125	$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-65~+150	$^\circ\text{C}$

ELECTRICAL CHARACTERISTICS AT SPECIFIED VIRTUAL JUNCTION TEMPERATURE ($V_i=11\text{V}$, $I_O=350\text{mA}$, $C_i=0.33\mu\text{F}$, $C_o=0.1\mu\text{F}$, unless otherwise specified)

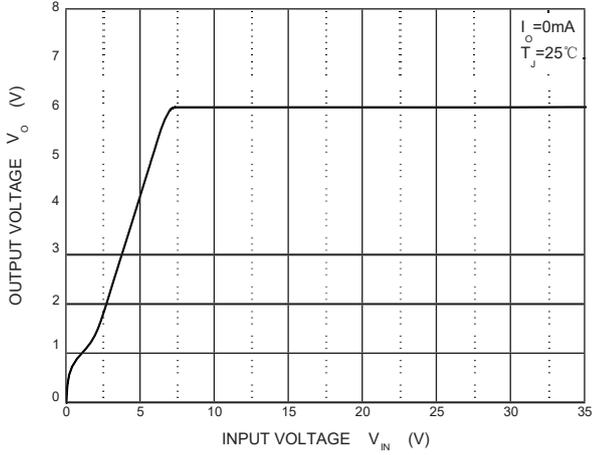
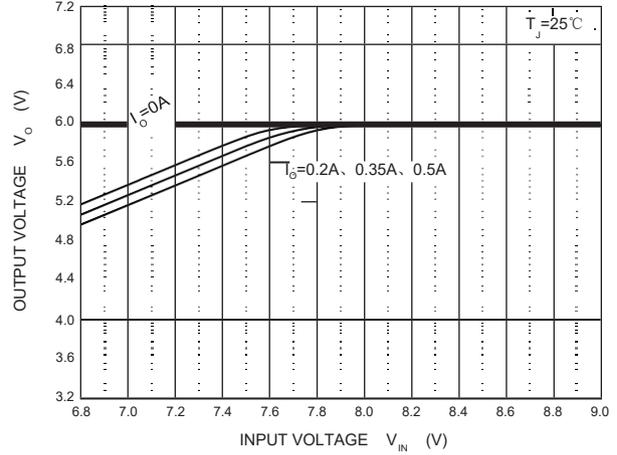
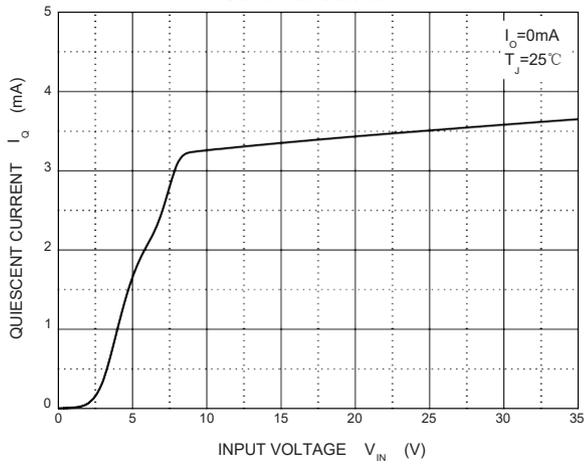
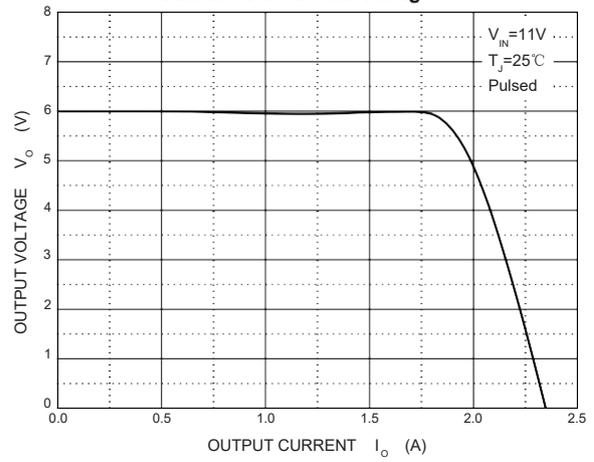
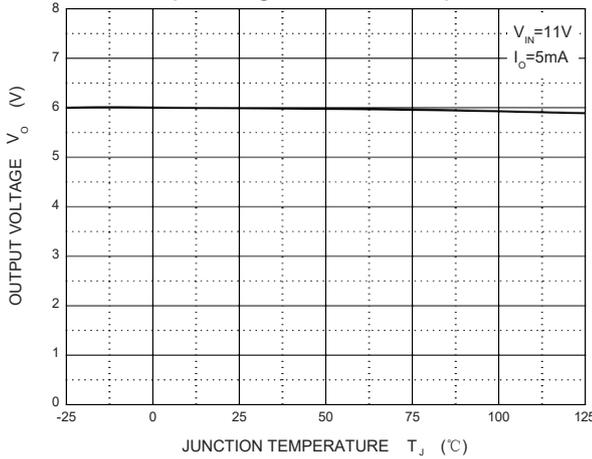
Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Output Voltage	V_o	$T_J=25^\circ\text{C}$	5.82	6	6.18	V
		$8\text{V} \leq V_i \leq 21\text{V}$, $I_o=5\text{mA}-350\text{mA}$	5.7	6	6.3	V
Load Regulation	ΔV_o	$I_o=5\text{mA}-0.5\text{A}$, $T_J=25^\circ\text{C}$		18	120	mV
		$I_o=5\text{mA}-200\text{mA}$, $T_J=25^\circ\text{C}$		10	60	mV
Line Regulation	ΔV_o	$8\text{V} \leq V_i \leq 25\text{V}$, $I_o=200\text{mA}$, $T_J=25^\circ\text{C}$		5	100	mV
		$9\text{V} \leq V_i \leq 25\text{V}$, $I_o=200\text{mA}$, $T_J=25^\circ\text{C}$		1.5	50	mV
Quiescent Current	I_q	$T_J=25^\circ\text{C}$		4.3	6	mA
Quiescent Current Change	ΔI_q	$9\text{V} \leq V_i \leq 25\text{V}$, $I_o=200\text{mA}$			0.8	mA
		$5\text{mA} \leq I_o \leq 350\text{mA}$			0.5	mA
Output Noise Voltage	V_N	$10\text{Hz} \leq f \leq 100\text{kHz}$, $T_J=25^\circ\text{C}$		45		$\mu\text{V}/V_o$
Ripple Rejection	RR	$9\text{V} \leq V_i \leq 19\text{V}$, $f=120\text{Hz}$, $I_o=300\text{mA}$	59	80		dB
Dropout Voltage	V_d	$I_o=350\text{mA}$, $T_J=25^\circ\text{C}$		2		V
Short Circuit Current	I_{sc}	$V_i=11\text{V}$, $T_J=25^\circ\text{C}$		270		mA
Peak Current	I_{pk}	$T_J=25^\circ\text{C}$		0.5		A

* Pulse test.

TYPICAL APPLICATION



Note: Bypass capacitors are recommended for optimum stability and transient response and should be located as close as possible to the regulators.

Output Characteristics

Dropout Characteristics

Quiescent Current

Current Cut-off Grid Voltage

Output Voltage vs Junction Temperature

Power Derating Curve
