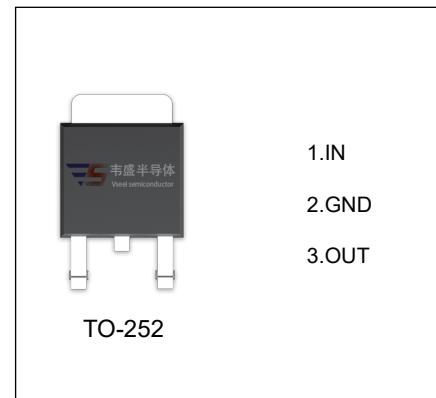


## VS78M15 Three-terminal positive voltage regulator

### FEATURES

- Maximum output current  
 $I_{OM}$ : 0.5 A
- Output voltage  
 $V_O$ : 15 V
- Continuous total dissipation  
 $P_D$ : 1.25 W( $T_a = 25^\circ C$ )



### ABSOLUTE MAXIMUM RATINGS (Operating temperature range applies unless otherwise specified)

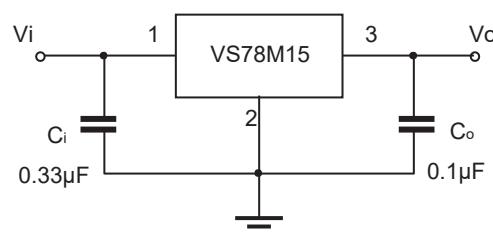
Parameter	Symbol	Value	Unit
Input Voltage	$V_i$	35	V
Thermal Resistance from Junction to Ambient	$R_{\theta JA}$	80	°C/W
Operating Junction Temperature Range	$T_{OPR}$	-40~+125	°C
Storage Temperature Range	$T_{STG}$	-65~+150	°C

### ELECTRICAL CHARACTERISTICS ( $V_i=23V, I_o=350mA, C_i=0.33\mu F, C_o=0.1\mu F$ , unless otherwise specified )

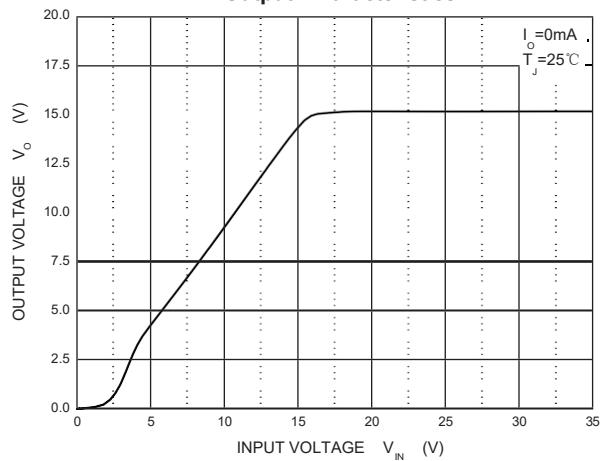
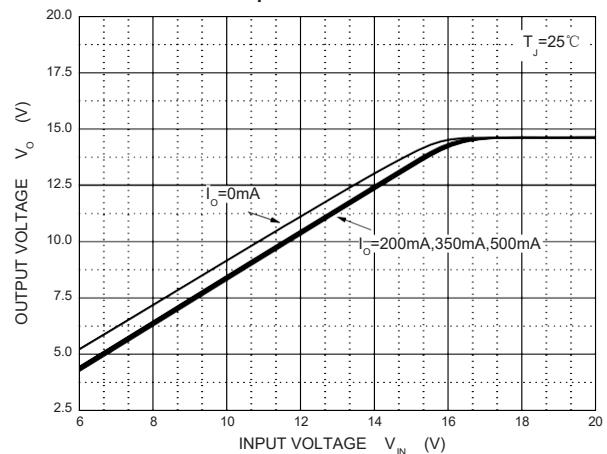
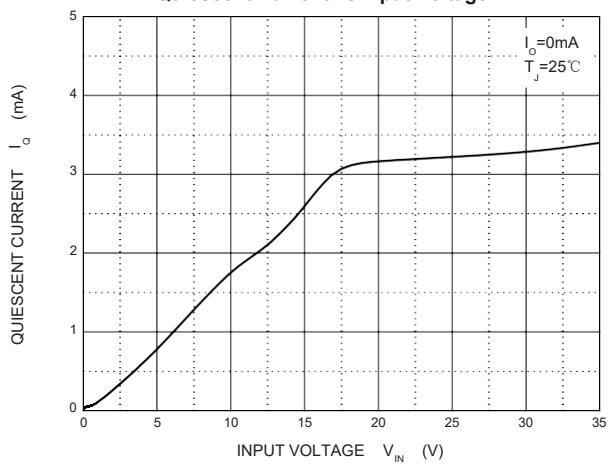
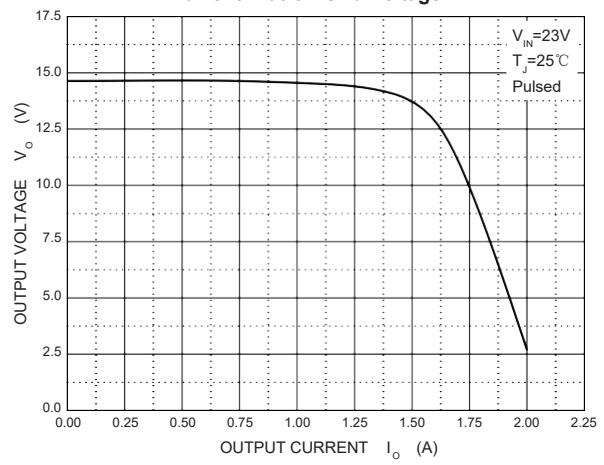
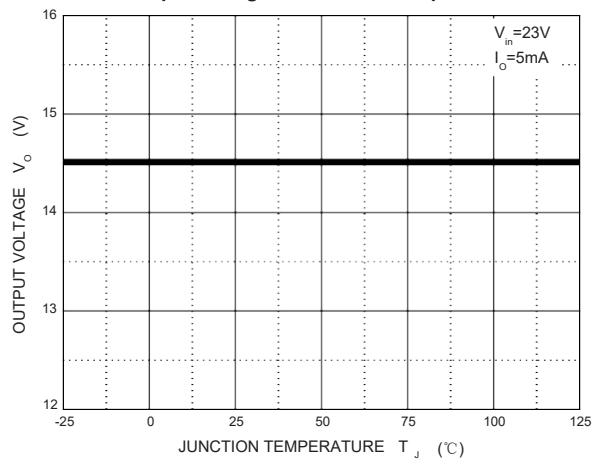
Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Output Voltage	$V_o$	$V_i=23V, I_o=350mA, T_J=25^\circ C$	14.55	15	15.45	V
		$17.5 \leq V_i \leq 30V, I_o=5mA \sim 350mA$	14.25	15	15.75	V
Load Regulation	$\Delta V_o$	$I_o=5mA \sim 500mA, T_J=25^\circ C$			300	mV
		$I_o=5mA \sim 200mA, T_J=25^\circ C$			150	mV
Line Regulation	$\Delta V_o$	$17.5V \leq V_i \leq 30V, I_o=200mA, T_J=25^\circ C$			100	mV
		$20V \leq V_i \leq 26V, I_o=200mA, T_J=25^\circ C$			50	mV
Quiescent Current	$I_q$	$V_i=23V, I_o=350mA, T_J=25^\circ C$			6	mA
Quiescent Current Change	$\Delta I_q$	$17.5V \leq V_i \leq 30V, I_o=200mA$			0.8	mA
	$\Delta I_q$	$V_i=23V, I_o=5mA \sim 350mA$			0.5	mA
Output Noise Voltage	$V_N$	$10Hz \leq f \leq 100KHz, T_J=25^\circ C$		90		$\mu V/V_o$
Ripple Rejection	$RR$	$18.5 \leq V_i \leq 28.5V, f=120Hz, I_o=300mA, T_J=25^\circ C$	54			dB
Dropout Voltage	$V_d$	$T_J=25^\circ C$		2		V

\* Pulse test.

### TYPICAL APPLICATION



Note: Bypass capacitors are recommended for optimum stability and transient response and should be located as close as possible to the regulators.

**Output Characteristics**

**Dropout Characteristics**

**Quiescent Current vs Input Voltage**

**Current Cut-off Grid Voltage**

**Output Voltage vs Junction Temperature**

**Power Derating Curve**
