

## 2SB1386 TRANSISTOR (PNP)

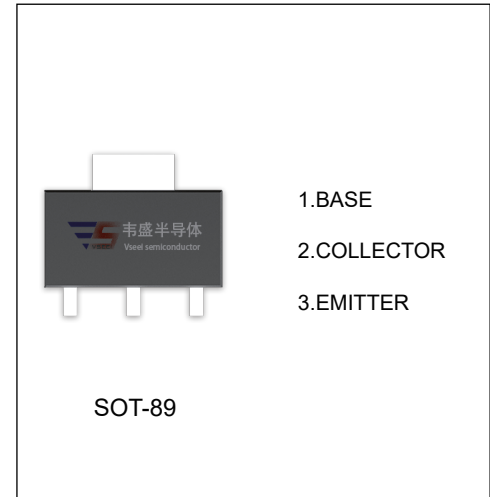
### FEATURES

- Low collector saturation voltage
- Excellent current-to-gain characteristics

### MAXIMUM RATINGS (T<sub>a</sub>=25°C unless otherwise noted)

Symbol	Parameter	Value	Unit
V <sub>CB0</sub>	Collector-Base Voltage	-30	V
V <sub>CEO</sub>	Collector-Emitter Voltage	-20	V
V <sub>EBO</sub>	Emitter-Base Voltage	-6	V
I <sub>C</sub>	Continuous Collector Current	-5	A
I <sub>CP</sub> *	Pulsed Collector Current	-10	A
P <sub>C</sub>	Collector Power Dissipation	0.5	W
T <sub>J</sub> , T <sub>stg</sub>	Operation Junction and Storage Temperature Range	-55~150	°C

\*Single pulse, P<sub>w</sub>=10ms

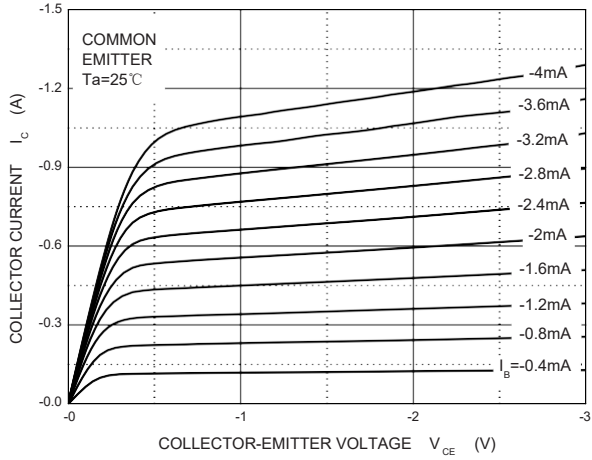
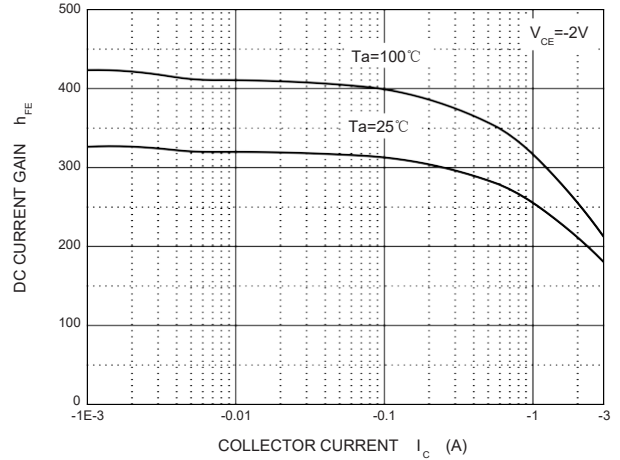
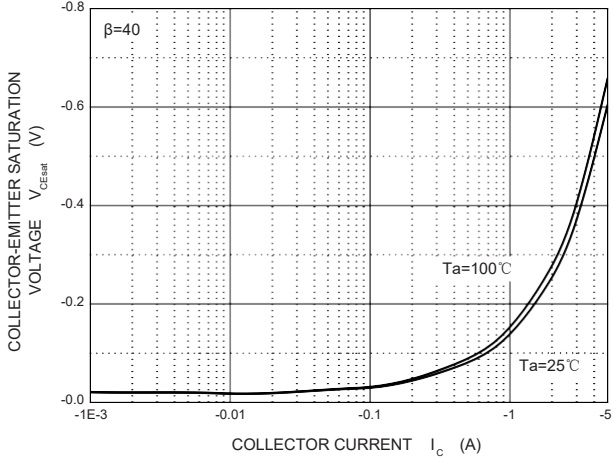
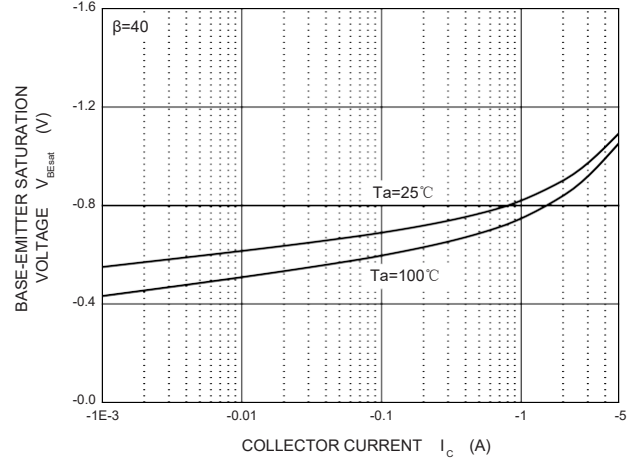
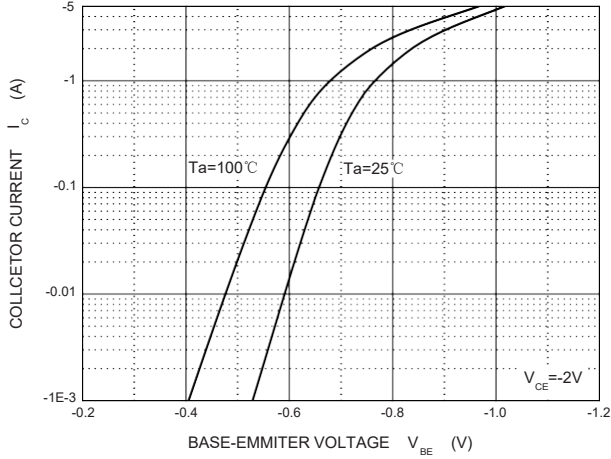
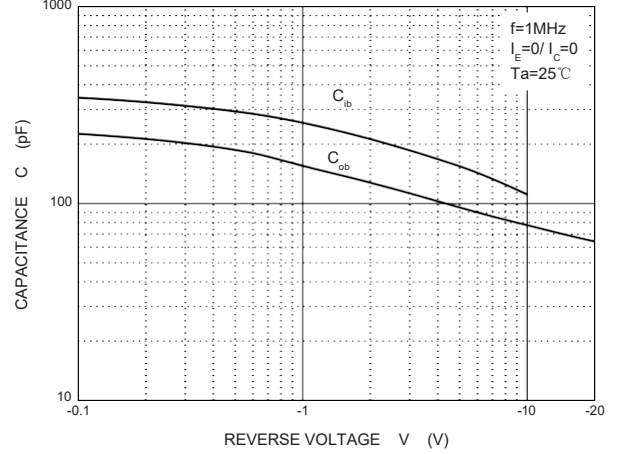


### ELECTRICAL CHARACTERISTICS (T<sub>a</sub>=25°C unless otherwise specified)

Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Collector-base breakdown voltage	V <sub>(BR)CBO</sub>	I <sub>C</sub> =-50μA, I <sub>E</sub> =0	-30			V
Collector-emitter breakdown voltage	V <sub>(BR)CEO</sub>	I <sub>C</sub> =-1mA, I <sub>B</sub> =0	-20			V
Emitter-base breakdown voltage	V <sub>(BR)EBO</sub>	I <sub>E</sub> =-50μA, I <sub>C</sub> =0	-6			V
Collector cut-off current	I <sub>CBO</sub>	V <sub>CB</sub> =-20V, I <sub>E</sub> =0			-0.5	μA
Emitter cut-off current	I <sub>EBO</sub>	V <sub>EB</sub> =-5V, I <sub>C</sub> =0			-0.5	μA
DC current gain	h <sub>FE</sub>	V <sub>CE</sub> =-2V, I <sub>C</sub> =-500mA	82		390	
Collector-emitter saturation voltage	V <sub>CE(sat)</sub>	I <sub>C</sub> =-4A, I <sub>B</sub> =-100mA			-1	V
Transition frequency	f <sub>T</sub>	V <sub>CE</sub> =-6V, I <sub>C</sub> =-50mA, f=30MHz		120		MHz
Collector output capacitance	C <sub>ob</sub>	V <sub>CB</sub> =-20V, I <sub>E</sub> =0, f=1MHz		60		pF

### CLASSIFICATION OF h<sub>FE</sub>

Rank	P	Q	R
Range	82-180	120-270	180-390
Marking	BHP	BHQ	BHR

**Static Characteristic**

 $h_{FE}$  —  $I_c$ 

 $V_{CEsat}$  —  $I_c$ 

 $V_{BEsat}$  —  $I_c$ 

 $I_c$  —  $V_{BE}$ 

 $C_{ob}/C_{ib}$  —  $V_{CB}/V_{EB}$ 

 $P_c$  —  $T_a$ 
