


2SD313 TRANSISTOR (NPN)

FEATURES

- Low Collector-Emitter Saturation Voltage
 $V_{CE(sat)}=1V(\text{MAX}) @ I_C=2A, I_B=0.2A$
- DC Current Gain $h_{FE}=40\sim320 @ I_C=1A$
- Complementray to PNP 2SB507

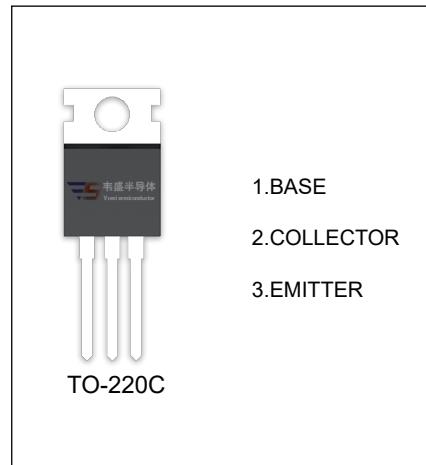

MAXIMUM RATINGS ($T_a=25^\circ\text{C}$ unless otherwise noted)

Symbol	Parameter	Value	Unit
V_{CBO}	Collector-Base Voltage	60	V
V_{CEO}	Collector-Emitter Voltage	60	V
V_{EBO}	Emitter-Base Voltage	5	V
I_C	Collector Current -Continuous	3	A
P_c	Collector Power Dissipation	1.75	W
T_J, T_{stg}	Operation Junction and Storage Temperature Range	-55-150	°C

ELECTRICAL CHARACTERISTICS ($T_a=25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Collector-base breakdown voltage	$V_{(BR)CBO}$	$I_C=100\mu\text{A}, I_E=0$	60			V
Collector-emitter breakdown voltage	$V_{(BR)CEO}$	$I_C=1\text{mA}, I_B=0$	60			V
Emitter-base breakdown voltage	$V_{(BR)EBO}$	$I_E=100\mu\text{A}, I_C=0$	5			V
Collector cut-off current	I_{CBO}	$V_{CB}=60\text{V}, I_E=0$			100	μA
Collector cut-off current	I_{CEO}	$V_{CE}=60\text{V}, I_E=0$			1	mA
Emitter cut-off current	I_{EBO}	$V_{EB}=4\text{V}, I_C=0$			100	μA
DC current gain	$h_{FE(1)}$	$V_{CE}=2\text{V}, I_C=1\text{A}$	40		320	
	$h_{FE(2)}$	$V_{CE}=2\text{V}, I_C=0.1\text{A}$	40			
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C=2\text{A}, I_B=200\text{mA}$			1	V
Base-emitter voltage	V_{BE}	$V_{CE}=2\text{V}, I_C=1\text{A}$			1.5	V
Transition frequency	f_T	$V_{CE}=5\text{V}, I_C=500\text{mA}$		8		MHz
Collector output capacitance	C_{ob}	$V_{CB}=10\text{V}, I_E=0, f=1\text{MHz}$		65		pF

CLASSIFICATION OF $h_{FE(1)}$

Rank	C	D	E	F
Range	40-80	60-120	100-200	160-320