



## 3DD13003 TRANSISTOR (NPN)

### FEATURES

- power switching applications

### MAXIMUM RATINGS (T<sub>a</sub>=25°C unless otherwise noted)

| Symbol                            | Parameter  | Value   | Unit |
|-----------------------------------|--|---------|------|
| V <sub>CBO</sub>                  | Collector-Base Voltage                           | 700     | V    |
| V <sub>CEO</sub>                  | Collector-Emitter Voltage                        | 400     | V    |
| V <sub>EBO</sub>                  | Emitter-Base Voltage                             | 9       | V    |
| I <sub>C</sub>                    | Collector Current -Continuous                    | 1.5     | A    |
| P <sub>C</sub>                    | Collector Power Dissipation                      | 2       | W    |
| T <sub>J</sub> , T <sub>stg</sub> | Operation Junction and Storage Temperature Range | -55~150 | °C   |

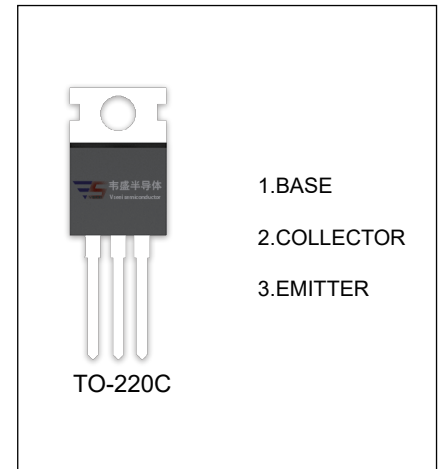

### ELECTRICAL CHARACTERISTICS (T<sub>a</sub>=25°C unless otherwise specified)

| Parameter                            | Symbol               | Test conditions  | Min | Typ | Max | Unit |
|--------------------------------------|----------------------|--|-----|-----|-----|------|
| Collector-base breakdown voltage     | V <sub>(BR)CBO</sub> | I <sub>C</sub> =5mA, I <sub>E</sub> =0   | 700 |     |     | V    |
| Collector-emitter breakdown voltage  | V <sub>(BR)CEO</sub> | I <sub>C</sub> =10mA, I <sub>B</sub> =0  | 400 |     |     | V    |
| Emitter-base breakdown voltage       | V <sub>(BR)EBO</sub> | I <sub>E</sub> =2mA, I <sub>C</sub> =0   | 9   |     |     | V    |
| Collector cut-off current            | I <sub>CBO</sub>     | V <sub>CB</sub> =700V, I <sub>E</sub> =0   |     |     | 1   | mA   |
| Collector cut-off current            | I <sub>CEO</sub>     | V <sub>CE</sub> =400V, I <sub>B</sub> =0   |     |     | 0.5 | mA   |
| Emitter cut-off current              | I <sub>EBO</sub>     | V <sub>EB</sub> =9V, I <sub>C</sub> =0   |     |     | 1   | mA   |
| DC current gain                      | h <sub>FE1</sub>     | V <sub>CE</sub> =5V, I <sub>C</sub> = 0.5 A  | 20  |     | 40  |      |
|                                      | h <sub>FE2</sub>     | V <sub>CE</sub> =5V, I <sub>C</sub> = 1.5A   | 5   |     |     |      |
| Collector-emitter saturation voltage | V <sub>CE(sat)</sub> | I <sub>C</sub> =1A, I <sub>B</sub> =0.25A  |     |     | 0.6 | V    |
| Base-emitter saturation voltage      | V <sub>BE(sat)</sub> | I <sub>C</sub> =1A, I <sub>B</sub> =0.25A  |     |     | 1.2 | V    |
| Transition frequency                 | f <sub>T</sub>       | V <sub>CE</sub> =10V, I <sub>C</sub> =100mA, f =1MHz                               | 5   |     |     | MHz  |
| Fall time                            | t <sub>f</sub>       | I <sub>C</sub> =1A, I <sub>B1</sub> =-I <sub>B2</sub> =0.2A, V <sub>CC</sub> =100V |     |     | 0.5 | μs   |
| Storage time                         | t <sub>S</sub>       | I <sub>C</sub> =250mA (UI9600)   | 2   |     | 4   | μs   |

### CLASSIFICATION OF h<sub>FE(1)</sub>

| Range | 20-30 | 30-40 |
|-------|-------|-------|
|       |       |       |

### CLASSIFICATION OF t<sub>S</sub>

| Rank  | A               | B              |
|-------|-----------------|----------------|
| Range | 2.0-3.0 ( μ s ) | 3.0-4.0( μ s ) |