


## DESCRIPTION:

With high ability to withstand the shock loading of large current, BTA16-600CW series triacs provide high dv/dt rate with strong resistance to electromagnetic interface. With high commutation performances, 3 quadrants products especially recommended for use on inductive load.



## MAIN FEATURES

Symbol	Value	Unit
$I_T(\text{RMS})$	16	A
$V_{\text{DRM}} / V_{\text{RRM}}$	600/800/1200	V

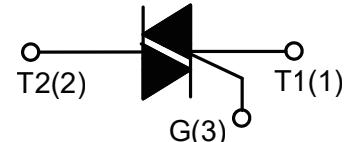

## ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Value	Unit
Storage junction temperature range	$T_{\text{stg}}$	-40-150	°C
Operating junction temperature range	$T_j$	-40-125	°C
Repetitive peak off-state voltage ( $T_j=25^\circ\text{C}$ )	$V_{\text{DRM}}$	600/800/1200	V
Repetitive peak reverse voltage ( $T_j=25^\circ\text{C}$ )	$V_{\text{RRM}}$	600/800/1200	V
Non repetitive surge peak Off-state voltage	$V_{\text{DSM}}$	$V_{\text{DRM}} + 100$	V
Non repetitive peak reverse voltage	$V_{\text{RSM}}$	$V_{\text{RRM}} + 100$	V
RMS on-state current	$I_{\text{T(RMS)}}$	16	A
Non repetitive surge peak on-state current (full cycle, F=50Hz)	$I_{\text{TSM}}$	160	A

I <sup>2</sup> t value for fusing (tp=10ms)	I <sup>2</sup> t	128	A <sup>2</sup> s
Critical rate of rise of on-state current (I <sub>G</sub> =2×I <sub>GT</sub> )	dI/dt	50	A/μs
Peak gate current	I <sub>GM</sub>	4	A
Average gate power dissipation	P <sub>G(AV)</sub>	1	W
Peak gate power	P <sub>GM</sub>	5	W

**ELECTRICAL CHARACTERISTICS (T<sub>j</sub>=25°C unless otherwise specified)**
**3 Quadrants**

Symbol	Test Condition	Quadrant		Value				Unit
				BW	CW	SW	TW	
I <sub>GT</sub>	V <sub>D</sub> =12V R <sub>L</sub> =33Ω	I - II - III	MAX	50	35	10	5	mA
V <sub>GT</sub>		I - II - III	MAX	1.3				V
V <sub>GD</sub>	V <sub>D</sub> =V <sub>DRM</sub> T <sub>j</sub> =125°C R <sub>L</sub> =3.3KΩ	I - II - III	MIN	0.2				V
I <sub>L</sub>	I <sub>G</sub> =1.2I <sub>GT</sub>	I - III	MAX	70	50	30	15	mA
		II		80	60	40	20	
I <sub>H</sub>	I <sub>T</sub> =100mA		MAX	60	40	25	15	mA
dV/dt	V <sub>D</sub> =2/3V <sub>DRM</sub> Gate Open T <sub>j</sub> =125°C		MIN	1000	500	200	100	V/μs

**4 Quadrants**

Symbol	Test Condition	Quadrant		Value		Unit	
				B	C		
I <sub>GT</sub>	V <sub>D</sub> =12V R <sub>L</sub> =33Ω	I - II - III	MAX	50	25	mA	
		IV		70	50		
V <sub>GT</sub>		ALL	MAX	1.5			
V <sub>GD</sub>	V <sub>D</sub> =V <sub>DRM</sub> T <sub>j</sub> =125°C R <sub>L</sub> =3.3KΩ	ALL	MIN	0.2			
I <sub>L</sub>	I <sub>G</sub> =1.2I <sub>GT</sub>	I - III-IV	MAX	70	50	mA	
		II		100	80		
I <sub>H</sub>	I <sub>T</sub> =100mA		MAX	60	40	mA	
dV/dt	V <sub>D</sub> =2/3V <sub>DRM</sub> Gate Open T <sub>j</sub> =125°C		MIN	500	200	V/μs	




## STATIC CHARACTERISTICS

Symbol	Parameter	Value(MAX)			Unit
		-600V	-800V	-1200V	
$V_{TM}$	$I_{TM} = 22.5A$ $t_p = 380\mu s$	$T_j = 25^\circ C$		1.5	
$I_{DRM}$	$V_D = V_{DRM}$ $V_R = V_{RRM}$	$T_j = 25^\circ C$	5	5	10
$I_{RRM}$		$T_j = 125^\circ C$	1	1	2


## THERMAL RESISTANCES

Symbol	Parameter	Value	Unit
$R_{th(j-c)}$	junction to case(AC)	TO-220A(Ins)	2.1
		TO-220A(Non-Ins)/ TO-220C	1.2
		TO-220F(Ins)	2.3
		TO-262	2.5
			°C/W


**FIG.1** Maximum power dissipation versus RMS on-state current

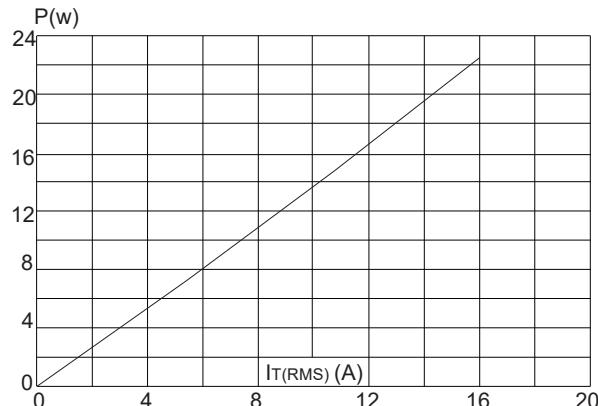


**FIG.3:** Surge peak on-state current versus number of cycles

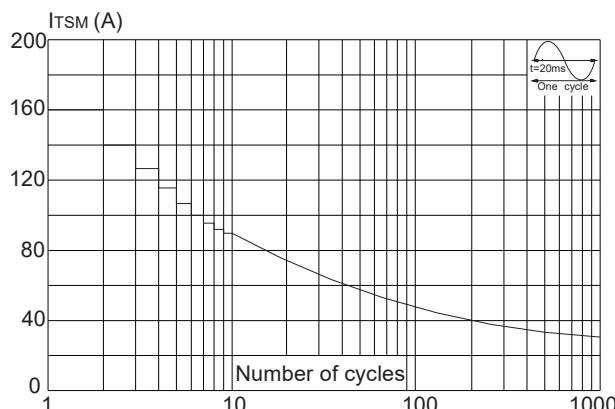


**FIG.5:** Non-repetitive surge peak on-state current for a sinusoidal pulse with width  $t_p < 20\text{ms}$ , and corresponding value of  $I^2t$  ( $dI/dt < 50\text{A}/\mu\text{s}$ )

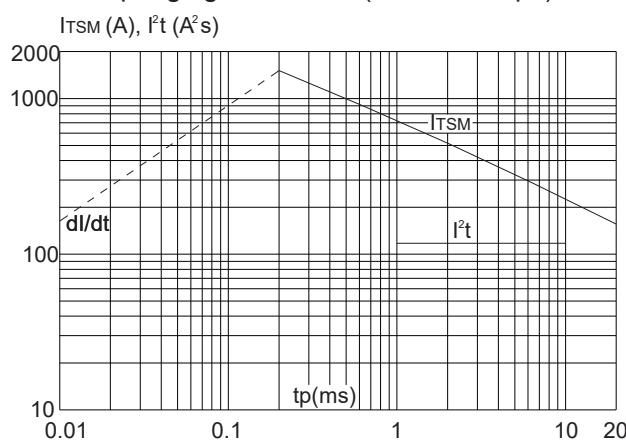

**FIG.2:** RMS on-state current versus case temperature

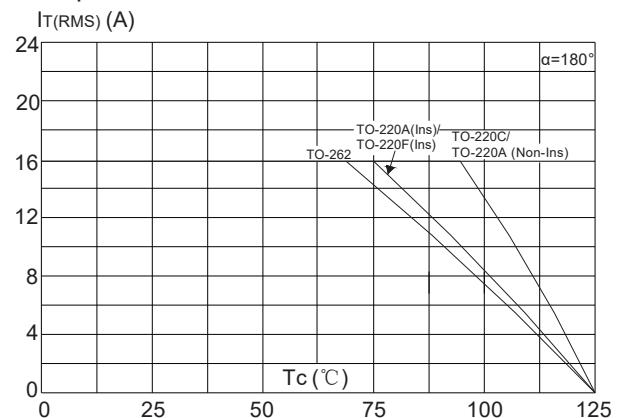

**FIG.4:** On-state characteristics (maximum values)

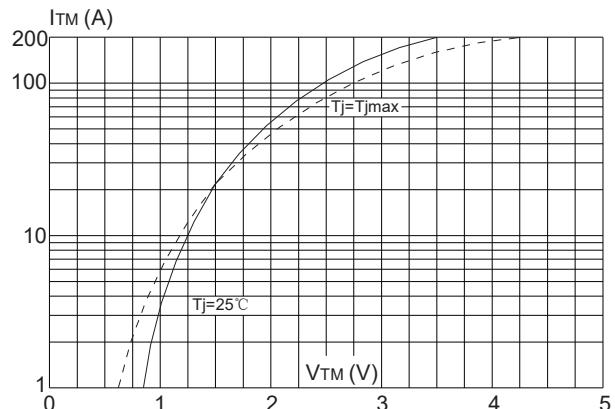

**FIG.6:** Relative variations of gate trigger current, holding current and latching current versus junction temperature

