


# **SBDD1045LCT** SCHOTTKY BARRIER RECTIFIER

## MAIN CHARACTERISTICS

<b>I<sub>O</sub></b>	<b>10 (2×5) A</b>
<b>V<sub>RRM</sub></b>	<b>45 V</b>
<b>T<sub>j</sub></b>	<b>150 °C</b>
<b>V<sub>F(typ)</sub></b>	<b>0.39V (@Tj=125°C)</b>

## FEATURES

- Low Power Loss, High Efficiency
- Guard Ring Die Construction for Transient Protection
- High Current Capability and Low Forward Voltage Drop

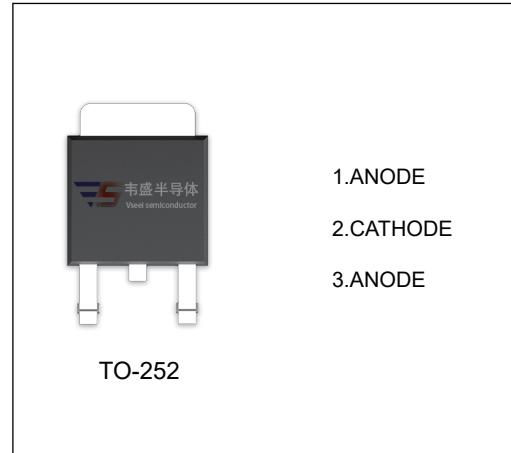

## MAXIMUM RATINGS ( T<sub>c</sub>=25°C unless otherwise noted )

Symbol	Parameter	Value	Unit
V <sub>RRM</sub>	Peak repetitive reverse voltage	45	V
V <sub>RWM</sub>	Working peak reverse voltage		
V <sub>R</sub>	DC blocking voltage		
V <sub>R(RMS)</sub>	RMS reverse voltage	31.5	V
I <sub>O</sub>	Average rectified output current	10	A
I <sub>FSM</sub>	Non-Repetitive peak forward surge current (8.3ms half sine wave)	120	A
R <sub>θJC</sub>	Thermal resistance from junction to case	5.0	°C/W
R <sub>θJA</sub>	Thermal resistance from junction to ambient	100	°C/W
T <sub>j</sub>	Junction temperature	150	°C
T <sub>stg</sub>	Storage temperature	-55~+150	°C

## ELECTRICAL CHARACTERISTICS ( T<sub>c</sub>=25°C unless otherwise specified )

Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Reverse voltage	V <sub>(BR)</sub>	I <sub>R</sub> =1mA	45			V
Reverse current	I <sub>R</sub>	V <sub>R</sub> =45V	T <sub>j</sub> =25°C	50	500	uA
			T <sub>j</sub> =125°C	50		mA
Forward voltage	V <sub>F</sub>	I <sub>F</sub> =3A	T <sub>j</sub> =25°C	0.43		V
			T <sub>j</sub> =125°C	0.34		V
		I <sub>F</sub> =5A	T <sub>j</sub> =25°C	0.47	0.55	V
			T <sub>j</sub> =125°C	0.39		V

\*Pulse test: pulse width ≤300μs, duty cycle≤ 2.0%.

FIG.1: FORWARD CURRENT DERATING CURVE

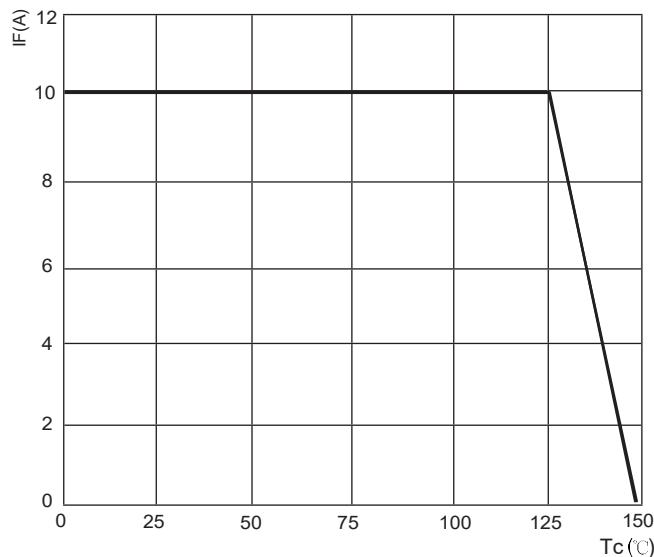


FIG.2: TYPICAL FORWARD CHARACTERISTICS

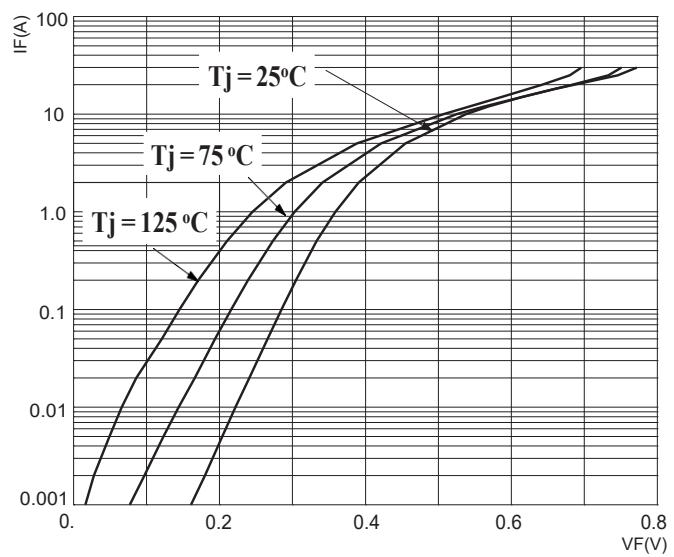


FIG.3: TOTAL CAPACITANCE DERATING CURVE

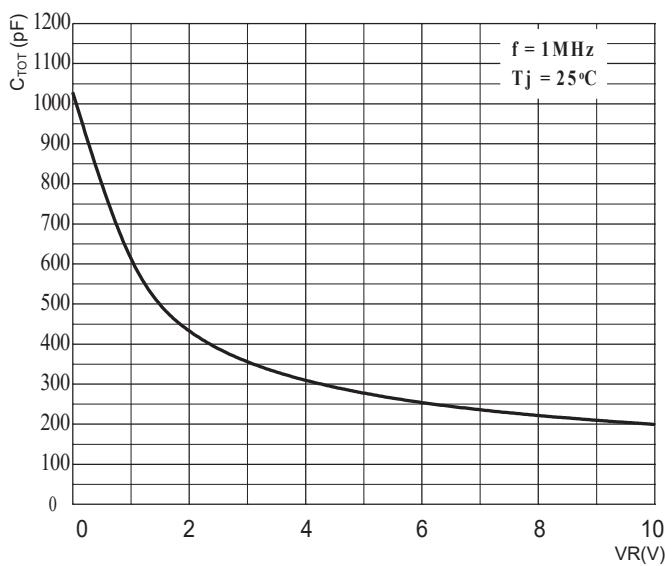


FIG.4: TYPICAL REVERSE CHARACTERISTICS

