


SBD1045CT、SBDF1045CT SCHOTTKY BARRIER RECTIFIER

MAIN CHARACTERISTICS

| | |
|-------------|------------------------------------|
| I_o | 10 (2×5) A |
| V_{RRM} | 45 V |
| T_j | 150 °C |
| V_F (typ) | 0.48V (@ $T_j=125^\circ\text{C}$) |

FEATURES

- Low Power Loss, High Efficiency
- Guard Ring Die Construction for Transient Protection
- High Current Capability and Low Forward Voltage Drop

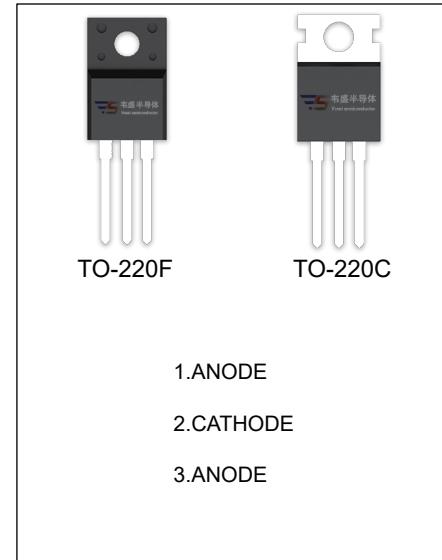

MAXIMUM RATINGS ($T_a=25^\circ\text{C}$ unless otherwise noted)

| Symbol | Parameter | SBD | | Unit |
|--------------|---|----------|---------|------|
| | | 1045CT | F1045CT | |
| V_{RRM} | Peak repetitive reverse voltage | 45 | V | |
| V_{RWM} | Working peak reverse voltage | | | |
| V_R | DC blocking voltage | | | |
| $V_{R(RMS)}$ | RMS reverse voltage | 31.5 | V | |
| I_o | Average rectified output current | 10 | A | |
| I_{FSM} | Non-Repetitive peak forward surge current (8.3ms half sine wave) | 120 | A | |
| $R_{θJC}$ | Thermal resistance from junction to case , $T_c=25^\circ\text{C}$ | 2.0 | 3.0 | °C/W |
| $R_{θJA}$ | Thermal resistance from junction to ambient | 62.5 | | °C/W |
| T_j | Junction temperature | 150 | | °C |
| T_{stg} | Storage temperature | -55~+150 | | °C |

ELECTRICAL CHARACTERISTICS ($T_a=25^\circ\text{C}$ unless otherwise specified)

| Parameter | Symbol | Test conditions | Min | Typ | Max | Unit |
|-----------------|------------|--------------------|---------------------------|------|------|------|
| Reverse voltage | $V_{(BR)}$ | $I_R=0.1\text{mA}$ | 45 | | | V |
| Reverse current | I_R | $V_R=45\text{V}$ | $T_j = 25^\circ\text{C}$ | 20 | 100 | uA |
| | | | $T_j = 125^\circ\text{C}$ | 20 | | mA |
| Forward voltage | V_F | $I_F=3\text{A}$ | $T_j = 25^\circ\text{C}$ | 0.46 | | V |
| | | | $T_j = 125^\circ\text{C}$ | 0.40 | | V |
| | | $I_F=5\text{A}$ | $T_j = 25^\circ\text{C}$ | 0.52 | 0.60 | V |
| | | | $T_j = 125^\circ\text{C}$ | 0.48 | | V |

*Pulse test: pulse width $\leq 300\mu\text{s}$, duty cycle $\leq 2.0\%$.

FIG.1: FORWARD CURRENT DERATING CURVE

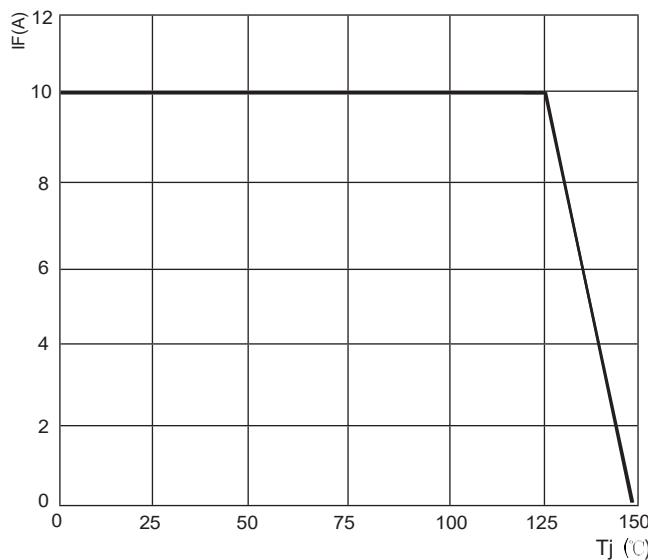


FIG.2: TYPICAL FORWARD CHARACTERISTICS

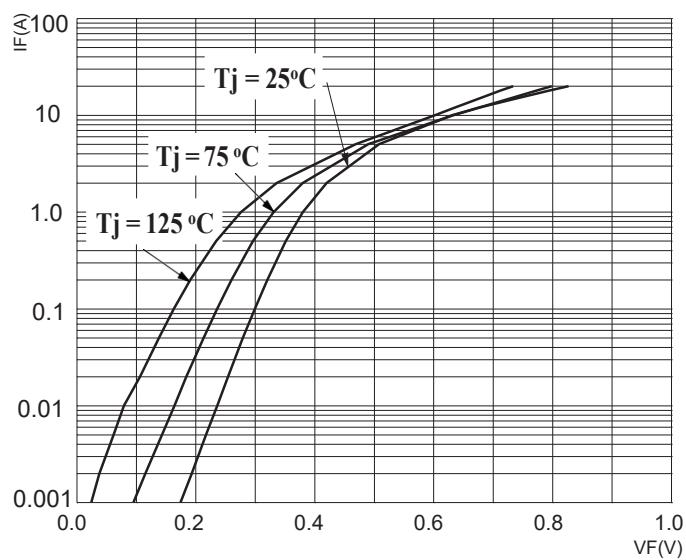


FIG.3: TOTAL CAPACITANCE DERATING CURVE

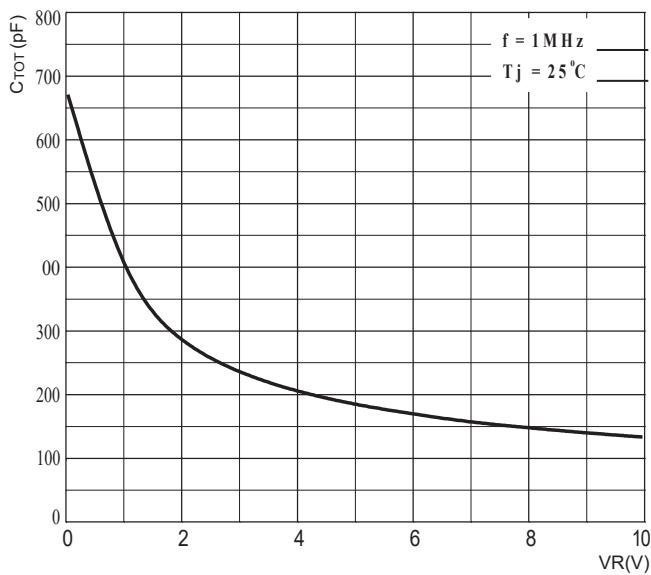


FIG.4: TYPICAL REVERSE CHARACTERISTICS

