

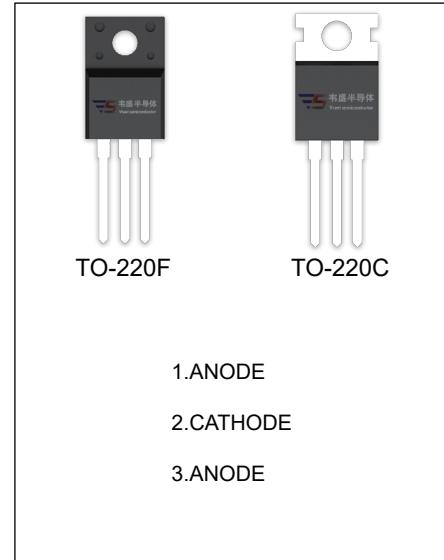
SBD30H300A、SBDF30H300A SCHOTTKY BARRIER RECTIFIER

MAIN CHARACTERISTICS

I_o	30A
V_{RRM}	300 V
T_j	175 °C
$V_{F(ty)}$	0.86V (@Tj=150°C)

FEATURES

- Low Power Loss, High Efficiency
- Guard Ring Die Construction for Transient Protection
- High Current Capability and Low Forward Voltage Drop



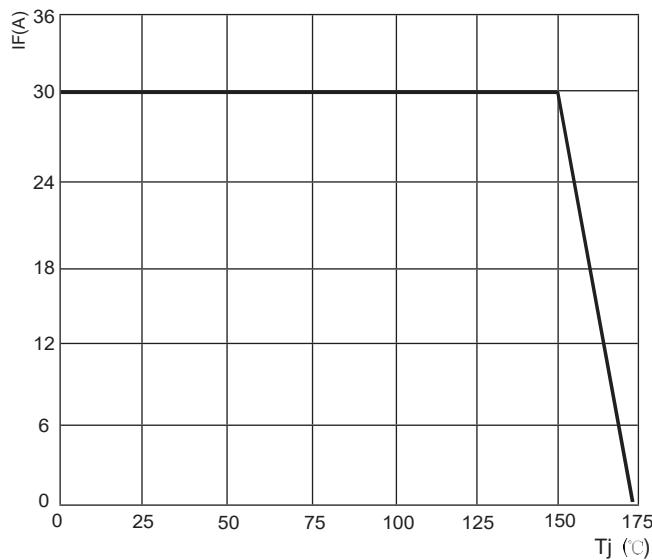
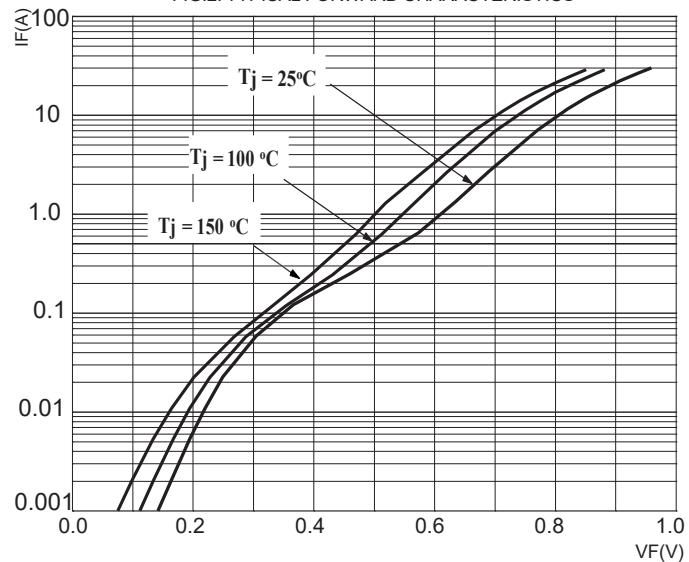
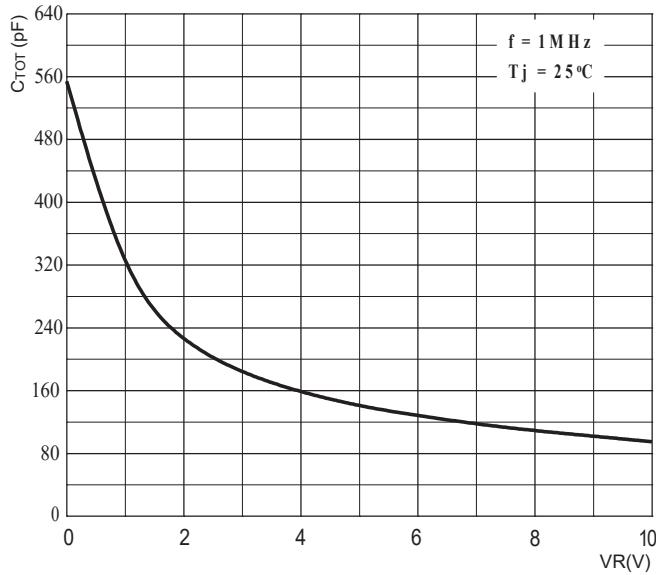
MAXIMUM RATINGS ($T_a=25^\circ\text{C}$ unless otherwise noted)

Symbol	Parameter	SBD		Unit
		30H300A	F30H300A	
V_{RRM}	Peak repetitive reverse voltage			
V_{RWM}	Working peak reverse voltage		300	V
V_R	DC blocking voltage			
$V_{R(RMS)}$	RMS reverse voltage		210	V
I_o	Average rectified output current		30	A
I_{FSM}	Non-Repetitive peak forward surge current (8.3ms half sine wave)		360	A
$R_{\Theta JC}$	Thermal resistance from junction to case , $T_c=25^\circ\text{C}$	2.0	3.0	°C/W
$R_{\Theta JA}$	Thermal resistance from junction to ambient		75	°C/W
T_j	Junction temperature		175	°C
T_{stg}	Storage temperature		-55~+175	°C

ELECTRICAL CHARACTERISTICS ($T_a=25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Reverse voltage	$V_{(BR)}$	$I_R=0.1\text{mA}$	300			V
Reverse current	I_R	$V_R=300\text{V}$	$T_j = 25^\circ\text{C}$	0.5	2.0	uA
			$T_j = 150^\circ\text{C}$	2.0		mA
Forward voltage	V_F	$I_F=15\text{A}$	$T_j = 25^\circ\text{C}$	0.85		V
			$T_j = 150^\circ\text{C}$	0.72		V
		$I_F=30\text{A}$	$T_j = 25^\circ\text{C}$	0.93	0.97	V
			$T_j = 150^\circ\text{C}$	0.86		V

*Pulse test: pulse width $\leq 300\mu\text{s}$, duty cycle $\leq 2.0\%$.

FIG.1: FORWARD CURRENT DERATING CURVE

FIG.2: TYPICAL FORWARD CHARACTERISTICS

FIG.3: TOTAL CAPACITANCE DERATING CURVE

FIG.4: TYPICAL REVERSE CHARACTERISTICS
