



DESCRIPTION:

With high ability to withstand the shock loading of large current, TYN610 series of silicon controlled rectifiers provide high dv/dt rate with strong resistance to electromagnetic interference. They are especially recommended for use on solid state relay, motorcycle, power charger, T-tools etc.



TO-220F

TO-220A

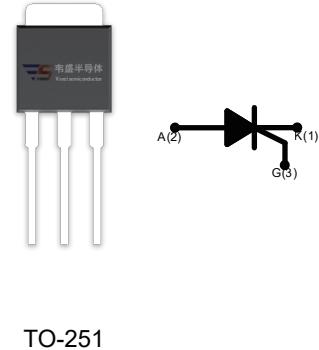

MAIN FEATURES

Symbol	Value	Symbol
V_{DRM}/V_{RRM}	600/800	V
$I_{T(RMS)}$	10	A
I_{GT}	≤ 10	mA

ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Value	Unit
Storage junction temperature range	T_{stg}	-40-150	°C
Operating junction temperature range	T_j	-40-150	°C
Repetitive peak off-state voltage($T_j=25^\circ\text{C}$)	V_{DRM}	600/800	V
Repetitive peak reverse voltage($T_j=25^\circ\text{C}$)	V_{RRM}	600/800	V
Non repetitive surge peak Off-state voltage	V_{DSM}	$V_{DRM} + 100$	V
Non repetitive peak reverse voltage	V_{RSM}	$V_{RRM} + 100$	V
RMS on-state current	$I_{T(RMS)}$	10	A

Non repetitive surge peak on-state current (tp=10ms)	I _{TSM}	120	A
I ² t value for fusing (tp=10ms)	I ² t	72	A ² s
Critical rate of rise of on-state current (I _G =2×I _{GT})	dI/dt	50	A/μs
Peak gate current	I _{GM}	4	A
Average gate power dissipation	P _{G(AV)}	1	W
Peak gate power	P _{GM}	5	W

ELECTRICAL CHARACTERISTICS (T_j=25°C unless otherwise specified)

Symbol	Test Condition	Value			Unit
		MIN.	TYP.	MAX.	
I _{GT}	V _D =12V R _L =33Ω	-	-	10	mA
V _{GT}		-	-	1.5	V
V _{GD}	V _D =V _{DRM} T _j =150°C R _L =3.3KΩ	0.2	-	-	V
I _L	I _G =1.2I _{GT}	-	-	40	mA
I _H	I _T =500mA	-	-	30	mA
dV/dt	V _D =2/3V _{DRM} Gate Open T _j =150°C	200	-	-	V/μs

STATIC CHARACTERISTICS

Symbol	Parameter	Value(MAX)	Unit
V _{TM}	I _{TM} =20A tp=380μs	1.55	V
I _{DRM}	V _D =V _{DRM} V _R =V _{RRM}	T _j =25°C	5
I _{RRM}		T _j =150°C	1
			mA

THERMAL RESISTANCES

Symbol	Parameter	Value	Unit
$R_{th(j-c)}$	junction to case(AC)	TO-220A(Ins)	2.5
		TO-220F(Ins)	2.8
		TO-220A(Non-Ins)	1.4
		TO-251	2.0

FIG.1 Maximum power dissipation versus RMS on-state current

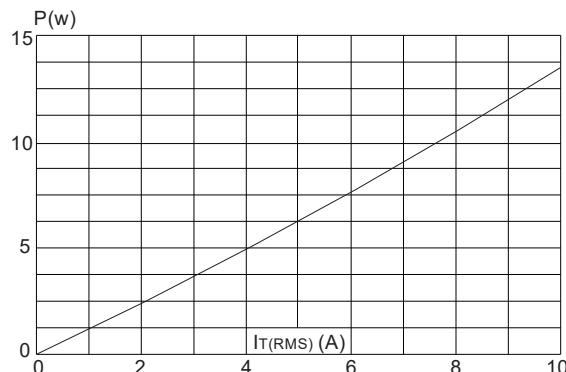


FIG.3: Surge peak on-state current versus number of cycles

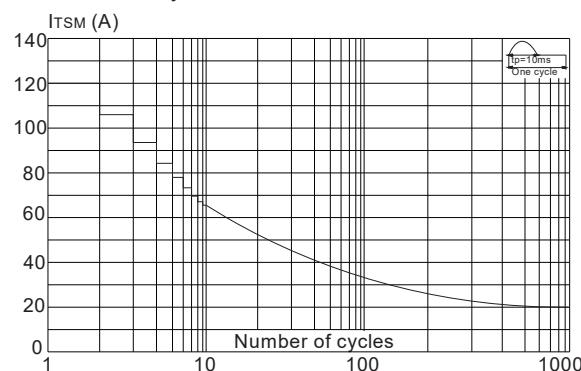


FIG.5: Non-repetitive surge peak on-state current for a sinusoidal pulse with width $t_p < 10\text{ms}$, and corresponding value of I^2t ($dI/dt < 50\text{A}/\mu\text{s}$)

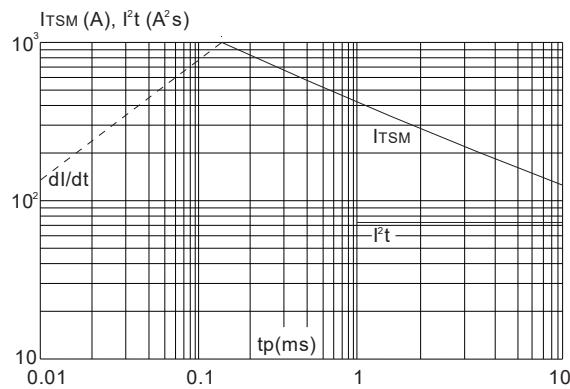


FIG.2: RMS on-state current versus case temperature

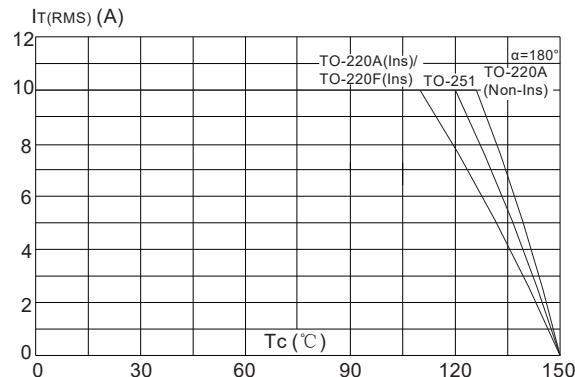


FIG.4: On-state characteristics (maximum values)

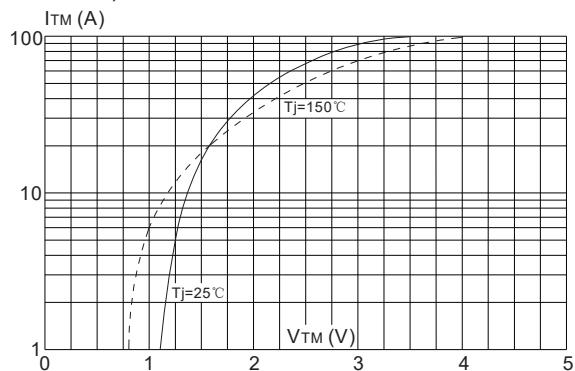


FIG.6: Relative variations of gate trigger current, holding current and latching current versus junction temperature

