

Description

The VST03P051 uses **Super Trench** technology that is uniquely optimized to provide the most efficient high frequency switching performance. Both conduction and switching power losses are minimized due to an extremely low combination of $R_{DS(ON)}$ and Q_g . This device is ideal for high-frequency switching and synchronous rectification.

General Features


- $V_{DS} = -30V, I_D = -90A$
- $R_{DS(ON)} = 5.1m\Omega$ (typical) @ $V_{GS} = -10V$
- $R_{DS(ON)} = 7.4m\Omega$ (typical) @ $V_{GS} = -4.5V$
- Excellent gate charge $\times R_{DS(on)}$ product(FOM)
- Very low on-resistance $R_{DS(on)}$
- 175°C operating temperature
- Pb-free lead plating
- 100% UIS tested

Application

- DC/DC Converter
- Ideal for high-frequency switching and synchronous rectification



TO-252



Schematic Diagram

Package Marking and Ordering Information

Device Marking	Device	Device Package	Reel Size	Tape width	Quantity
VST03P051-T2	VST03P051	TO-252	-	-	-

Absolute Maximum Ratings ($T_c=25^\circ C$ unless otherwise noted)

Parameter	Symbol	Limit	Unit
Drain-Source Voltage	V_{DS}	-30	V
Gate-Source Voltage	V_{GS}	± 20	V
Drain Current-Continuous	I_D	-90	A
Drain Current-Continuous($T_c=100^\circ C$)	$I_D (100^\circ C)$	-63.6	A
Pulsed Drain Current	I_{DM}	-300	A
Maximum Power Dissipation	P_D	75	W
Derating factor		0.6	W/ $^\circ C$
Single pulse avalanche energy ^(Note 5)	E_{AS}	500	mJ
Operating Junction and Storage Temperature Range	T_J, T_{STG}	-55 To 150	$^\circ C$

Thermal Characteristic

Thermal Resistance, Junction-to-Case ^(Note 2)	$R_{\theta JC}$	1.0	$^\circ C/W$
--	-----------------	-----	--------------

Electrical Characteristics ($T_c=25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Condition	Min	Typ	Max	Unit
Off Characteristics						
Drain-Source Breakdown Voltage	BV_{DSS}	$\text{V}_{\text{GS}}=0\text{V}, \text{I}_D=-250\mu\text{A}$	-30		-	V
Zero Gate Voltage Drain Current	I_{DSS}	$\text{V}_{\text{DS}}=-30\text{V}, \text{V}_{\text{GS}}=0\text{V}$	-	-	1	μA
Gate-Body Leakage Current	I_{GSS}	$\text{V}_{\text{GS}}=\pm20\text{V}, \text{V}_{\text{DS}}=0\text{V}$	-	-	±100	nA
On Characteristics (Note 3)						
Gate Threshold Voltage	$\text{V}_{\text{GS}(\text{th})}$	$\text{V}_{\text{DS}}=\text{V}_{\text{GS}}, \text{I}_D=-250\mu\text{A}$	-1.0	-1.5	-2.2	V
Drain-Source On-State Resistance	$\text{R}_{\text{DS}(\text{ON})}$	$\text{V}_{\text{GS}}=-10\text{V}, \text{I}_D=-20\text{A}$	-	5.1	5.6	$\text{m}\Omega$
		$\text{V}_{\text{GS}}=-4.5\text{V}, \text{I}_D=-20\text{A}$	-	7.4	8.0	$\text{m}\Omega$
Forward Transconductance	g_{FS}	$\text{V}_{\text{DS}}=-5\text{V}, \text{I}_D=-20\text{A}$	-	30	-	S
Dynamic Characteristics (Note 4)						
Input Capacitance	C_{iss}	$\text{V}_{\text{DS}}=-15\text{V}, \text{V}_{\text{GS}}=0\text{V}, \text{F}=1.0\text{MHz}$	-	3914	-	PF
Output Capacitance	C_{oss}		-	1263	-	PF
Reverse Transfer Capacitance	C_{rss}		-	50	-	PF
Switching Characteristics (Note 4)						
Turn-on Delay Time	$t_{\text{d}(\text{on})}$	$\text{V}_{\text{DD}}=-15\text{V}, \text{I}_D=-20\text{A}$ $\text{V}_{\text{GS}}=-10\text{V}, \text{R}_G=1.6\Omega$	-	10.5	-	nS
Turn-on Rise Time	t_r		-	9	-	nS
Turn-Off Delay Time	$t_{\text{d}(\text{off})}$		-	40	-	nS
Turn-Off Fall Time	t_f		-	10	-	nS
Total Gate Charge	Q_g	$\text{V}_{\text{DS}}=-15\text{V}, \text{I}_D=-20\text{A}, \text{V}_{\text{GS}}=-10\text{V}$	-	52	-	nC
Gate-Source Charge	Q_{gs}		-	9.6	-	nC
Gate-Drain Charge	Q_{gd}		-	7.0	-	nC
Drain-Source Diode Characteristics						
Diode Forward Voltage (Note 3)	V_{SD}	$\text{V}_{\text{GS}}=0\text{V}, \text{I}_S=-20\text{A}$	-		-1.2	V
Diode Forward Current (Note 2)	I_S		-	-	-90	A
Reverse Recovery Time	t_{rr}	$\text{T}_J = 25^\circ\text{C}, \text{I}_F = -20\text{A}$ $\text{di}/\text{dt} = 100\text{A}/\mu\text{s}$ (Note 3)	-		24	nS
Reverse Recovery Charge	Q_{rr}		-		68	nC

Notes:

1. Repetitive Rating: Pulse width limited by maximum junction temperature.
2. Surface Mounted on FR4 Board, $t \leq 10$ sec.
3. Pulse Test: Pulse Width $\leq 300\mu\text{s}$, Duty Cycle $\leq 2\%$.
4. Guaranteed by design, not subject to production
5. EAS condition : $\text{T}_J=25^\circ\text{C}, \text{V}_{\text{DD}}=-20\text{V}, \text{V}_{\text{G}}=-10\text{V}, \text{L}=0.5\text{mH}, \text{R}_G=25\Omega$

Typical Electrical and Thermal Characteristics

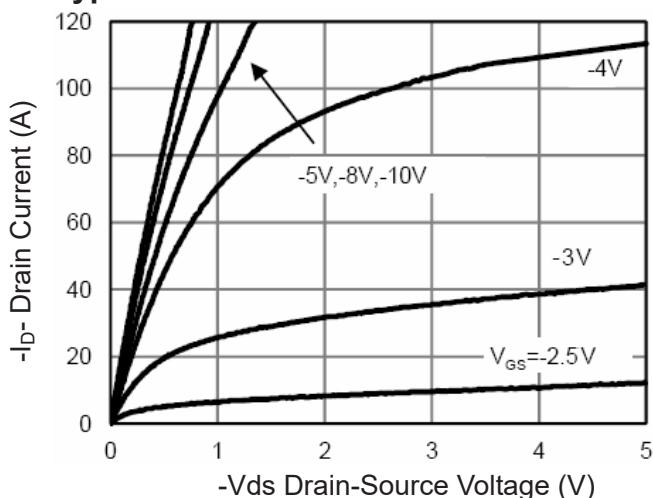


Figure 1 Output Characteristics

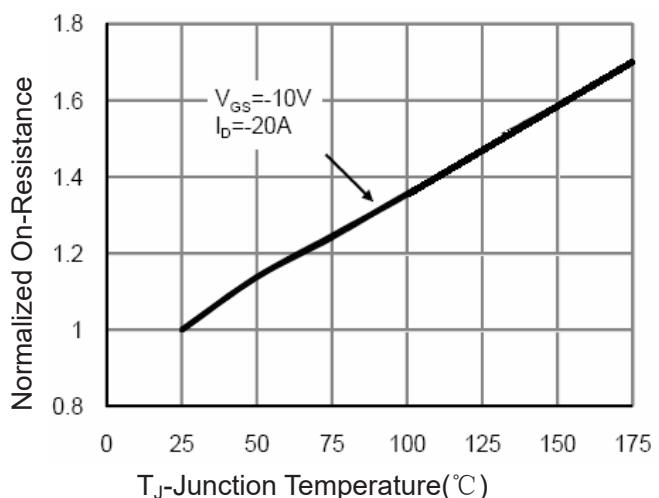


Figure 4 Rdson-JunctionTemperature

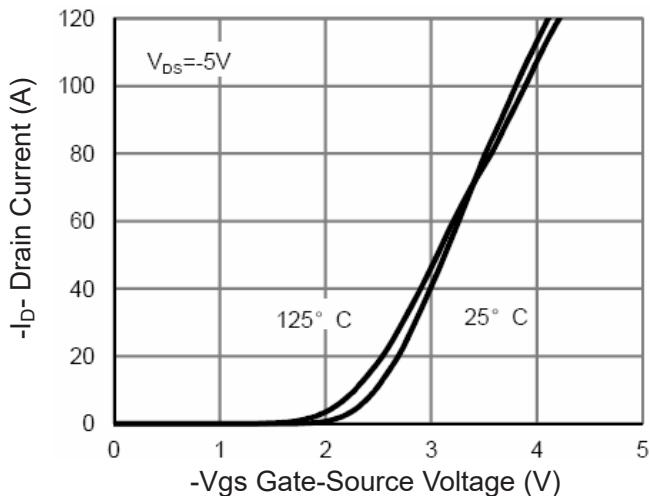


Figure 2 Transfer Characteristics

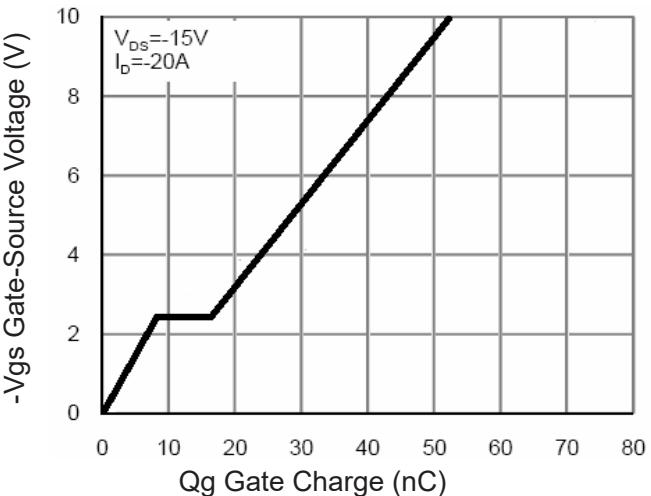


Figure 5 Gate Charge

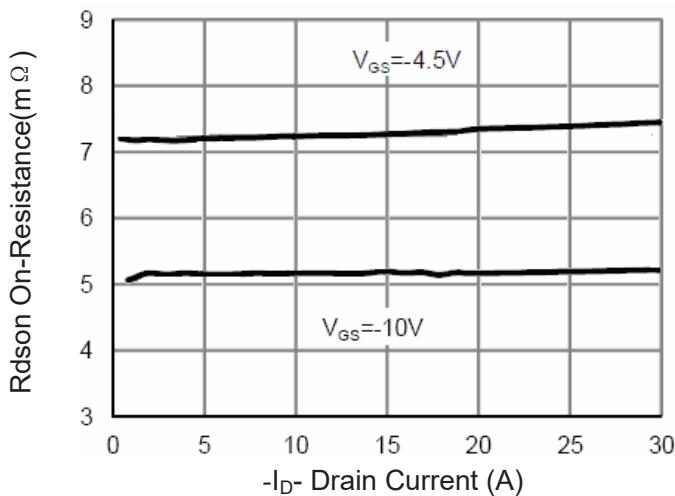


Figure 3 Rdson- Drain Current

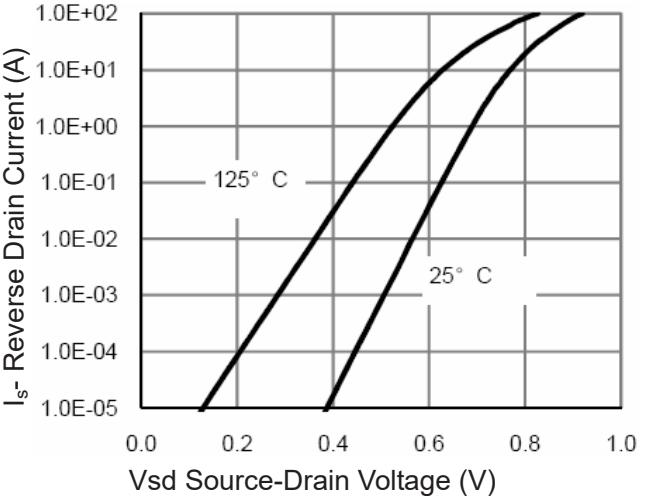
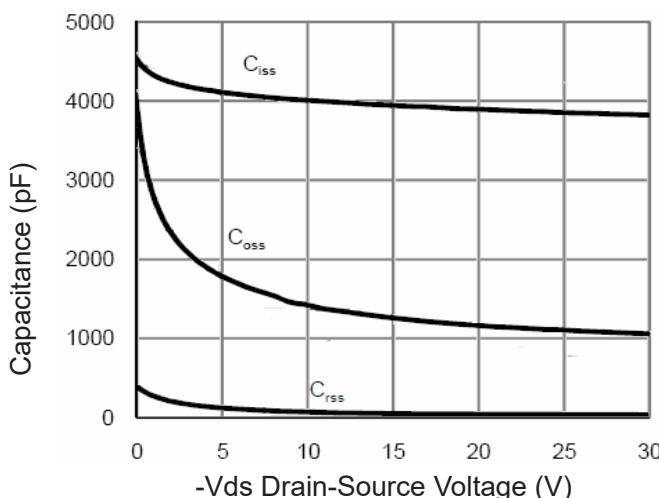
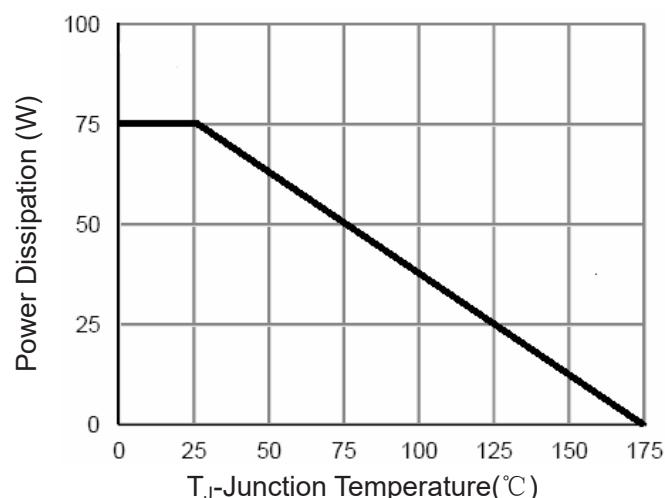
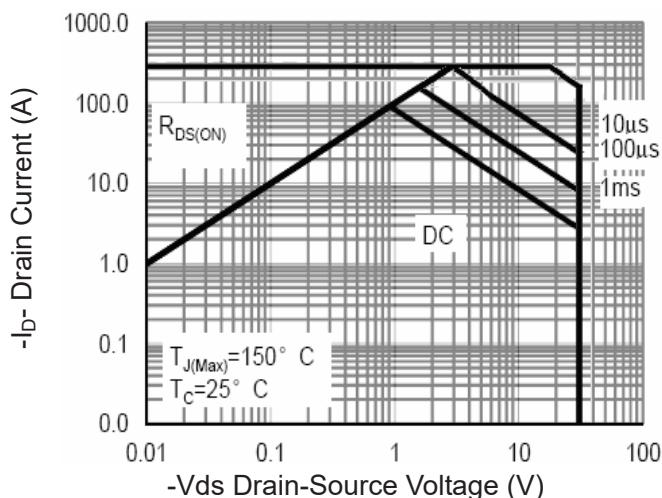
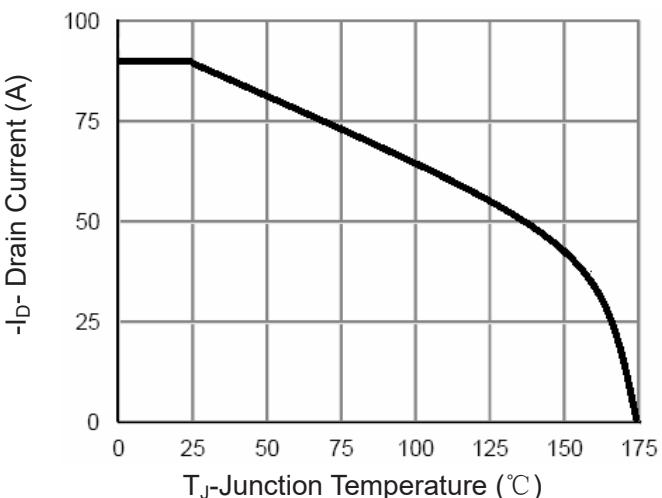
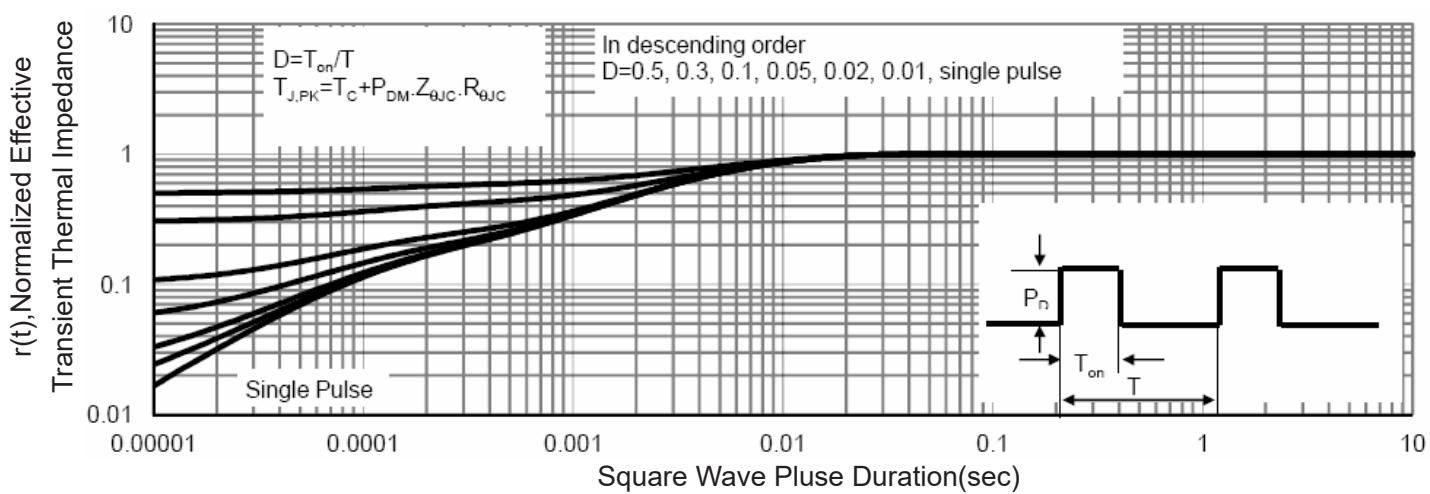


Figure 6 Source- Drift Diode Forward


Figure 7 Capacitance vs Vds

Figure 9 Power De-rating

Figure 8 Safe Operation Area

Figure 10 Current De-rating

Figure 11 Normalized Maximum Transient Thermal Impedance