

## Description


The series of devices uses **Super Trench II** technology that is uniquely optimized to provide the most efficient high frequency switching performance. Both conduction and switching power losses are minimized due to an extremely low combination of  $R_{DS(on)}$  and  $Q_g$ . This device is ideal for high-frequency switching and synchronous rectification.

## Application

- DC/DC Converter
- Ideal for high-frequency switching and synchronous rectification

## General Features

- $V_{DS} = 120V, I_D = 100A$
- $R_{DS(on)} = 6.5m\Omega$ , typical (TO-220)@  $V_{GS} = 10V$
- $R_{DS(on)} = 6.3m\Omega$ , typical (TO-263)@  $V_{GS} = 10V$
- Excellent gate charge  $\times R_{DS(on)}$  product(FOM)
- Very low on-resistance  $R_{DS(on)}$
- 175 °C operating temperature
- Pb-free lead plating



Schematic Diagram

## Package Marking and Ordering Information

Device Marking	Device	Device Package	Reel Size	Tape width	Quantity
VST12N065-T3	VST12N065	TO-220C	-	-	-
VST12N065-TC	VST12N065	TO-263	-	-	-

## Absolute Maximum Ratings ( $T_c = 25^\circ C$ unless otherwise noted)

Parameter	Symbol	Limit	Unit
Drain-Source Voltage	$V_{DS}$	120	V
Gate-Source Voltage	$V_{GS}$	$\pm 20$	V
Drain Current-Continuous	$I_D$	100	A
Drain Current-Continuous( $T_c = 100^\circ C$ )	$I_D(100^\circ C)$	72	A
Pulsed Drain Current	$I_{DM}$	400	A
Maximum Power Dissipation	$P_D$	150	W
Derating factor		1.0	W/°C
Single pulse avalanche energy <sup>(Note 4)</sup>	$E_{AS}$	450	mJ
Operating Junction and Storage Temperature Range	$T_J, T_{STG}$	-55 To 175	°C

## Thermal Characteristic

Thermal Resistance, Junction-to-Case	$R_{\theta JC}$	1.0	°C/W
--------------------------------------	-----------------	-----	------


**Electrical Characteristics ( $T_c=25^\circ\text{C}$  unless otherwise noted)**

Parameter	Symbol	Condition	Min	Typ	Max	Unit
<b>Off Characteristics</b>						
Drain-Source Breakdown Voltage	$\text{BV}_{\text{DSS}}$	$\text{V}_{\text{GS}}=0\text{V}, \text{I}_D=250\mu\text{A}$	120		-	V
Zero Gate Voltage Drain Current	$\text{I}_{\text{DSS}}$	$\text{V}_{\text{DS}}=120\text{V}, \text{V}_{\text{GS}}=0\text{V}$	-	-	1	$\mu\text{A}$
Gate-Body Leakage Current	$\text{I}_{\text{GSS}}$	$\text{V}_{\text{GS}}=\pm20\text{V}, \text{V}_{\text{DS}}=0\text{V}$	-	-	$\pm100$	nA
<b>On Characteristics</b> (Note 3)						
Gate Threshold Voltage	$\text{V}_{\text{GS}(\text{th})}$	$\text{V}_{\text{DS}}=\text{V}_{\text{GS}}, \text{I}_D=250\mu\text{A}$	2.0	3.0	4.0	V
Drain-Source On-State Resistance	$\text{R}_{\text{DS}(\text{ON})}$	$\text{V}_{\text{GS}}=10\text{V}, \text{I}_D=50\text{A}$	TO-220	-	6.5	7.0
			TO-263		6.3	7.0
Forward Transconductance	$\text{g}_{\text{FS}}$	$\text{V}_{\text{DS}}=5\text{V}, \text{I}_D=50\text{A}$		60	-	S
<b>Dynamic Characteristics</b> (Note 3)						
Input Capacitance	$\text{C}_{\text{iss}}$	$\text{V}_{\text{DS}}=60\text{V}, \text{V}_{\text{GS}}=0\text{V}, \text{F}=1.0\text{MHz}$	-	3450	-	pF
Output Capacitance	$\text{C}_{\text{oss}}$		-	390	-	pF
Reverse Transfer Capacitance	$\text{C}_{\text{rss}}$		-	18	-	pF
<b>Switching Characteristics</b> (Note 3)						
Turn-on Delay Time	$t_{\text{d}(\text{on})}$	$\text{V}_{\text{DD}}=60\text{V}, \text{I}_D=50\text{A}, \text{V}_{\text{GS}}=10\text{V}, \text{R}_G=1.6\Omega$	-	20	-	nS
Turn-on Rise Time	$t_r$		-	15	-	nS
Turn-Off Delay Time	$t_{\text{d}(\text{off})}$		-	40	-	nS
Turn-Off Fall Time	$t_f$		-	10	-	nS
Total Gate Charge	$\text{Q}_g$	$\text{V}_{\text{DS}}=60\text{V}, \text{I}_D=50\text{A}, \text{V}_{\text{GS}}=10\text{V}$	-	57	-	nC
Gate-Source Charge	$\text{Q}_{\text{gs}}$		-	21	-	nC
Gate-Drain Charge	$\text{Q}_{\text{gd}}$		-	13	-	nC
<b>Drain-Source Diode Characteristics</b>						
Diode Forward Voltage (Note 2)	$\text{V}_{\text{SD}}$	$\text{V}_{\text{GS}}=0\text{V}, \text{I}_s=50\text{A}$	-	-	1.2	V
Diode Forward Current	$\text{I}_s$		-	-	100	A
Reverse Recovery Time	$t_{\text{rr}}$	$\text{T}_J = 25^\circ\text{C}, \text{I}_F = 100\text{A}$ $\text{di}/\text{dt} = 100\text{A}/\mu\text{s}$ (Note 3)	-	70	-	nS
Reverse Recovery Charge	$\text{Q}_{\text{rr}}$		-	110	-	nC


**Notes:**

1. Repetitive Rating: Pulse width limited by maximum junction temperature.
2. Pulse Test: Pulse Width  $\leq 300\mu\text{s}$ , Duty Cycle  $\leq 2\%$ .
3. Guaranteed by design, not subject to production
4. EAS condition :  $\text{T}_J=25^\circ\text{C}, \text{V}_{\text{DD}}=50\text{V}, \text{V}_{\text{G}}=10\text{V}, \text{L}=0.25\text{mH}, \text{R}_G=25\Omega$


### Typical Electrical and Thermal Characteristics

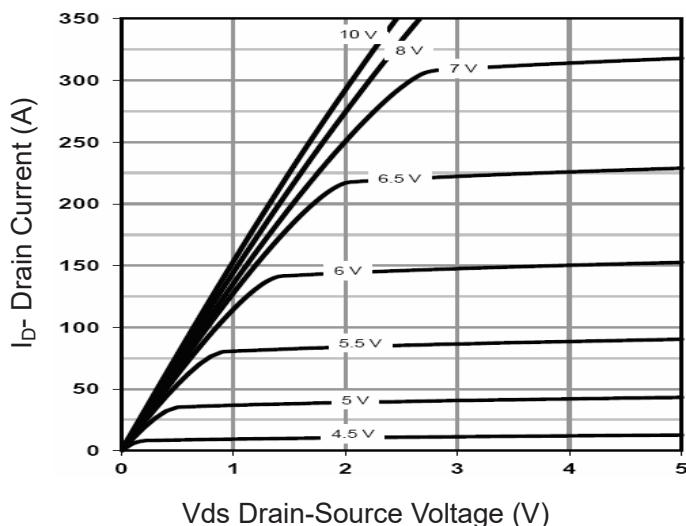


**Figure 1 Output Characteristics**

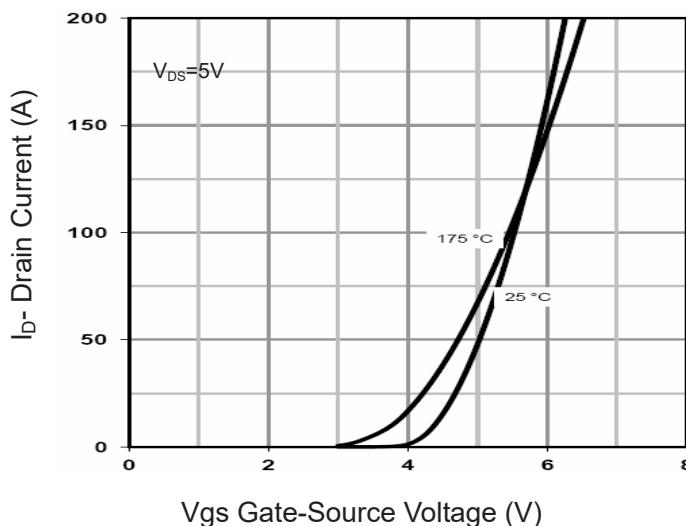


**Figure 2 Transfer Characteristics**

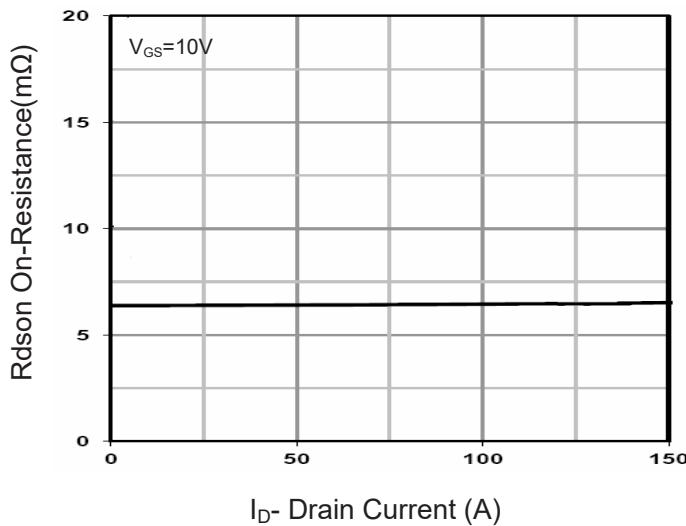


**Figure 3 Rdson- Drain Current**

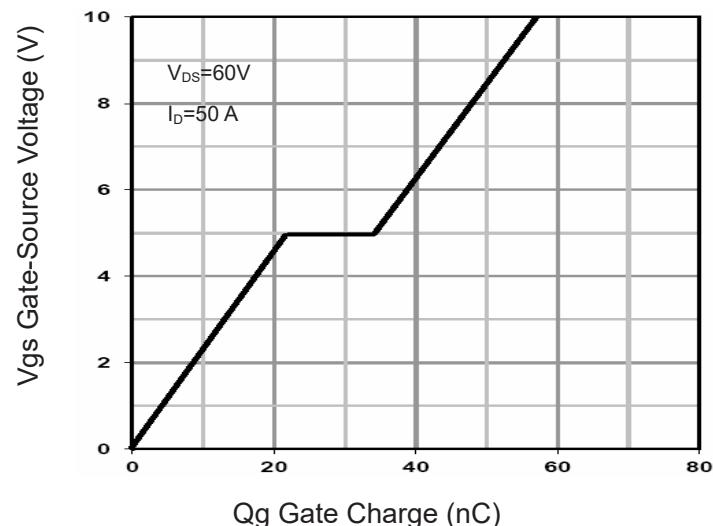






**Figure 4 Gate Charge**

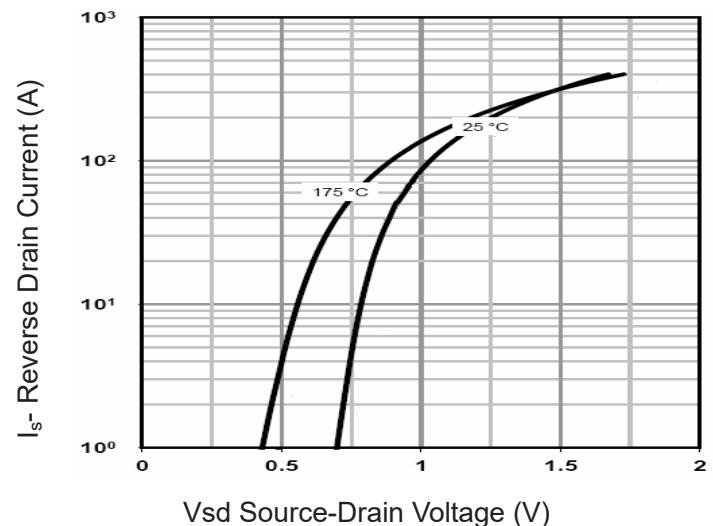

**Figure 5 Source- Drain Diode Forward**

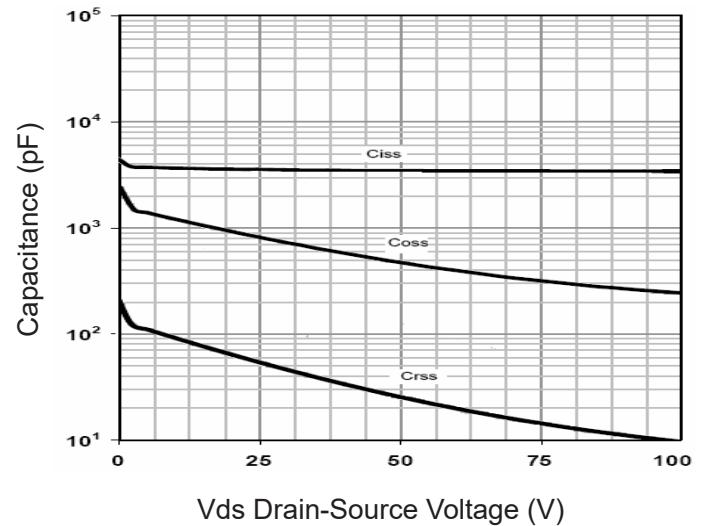

**Figure 6 Capacitance vs Vds**

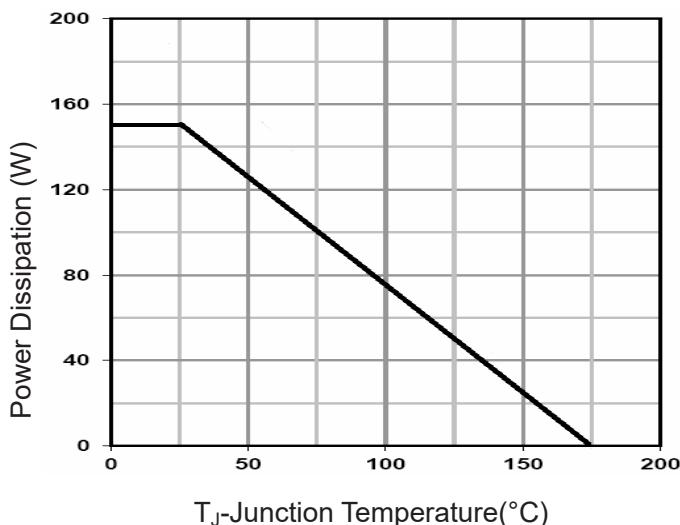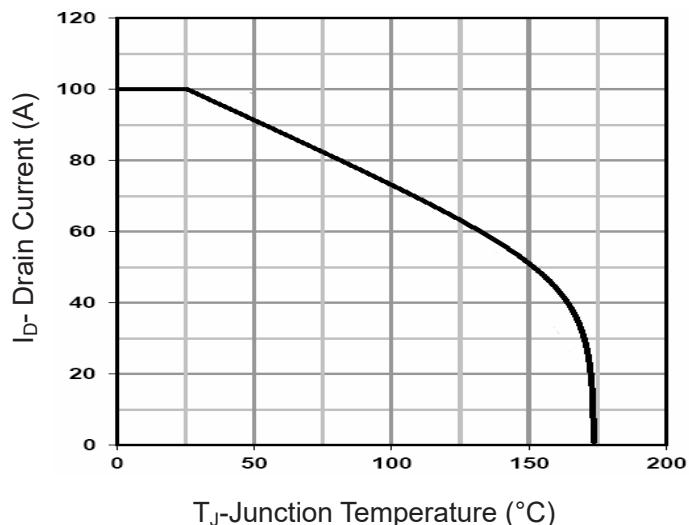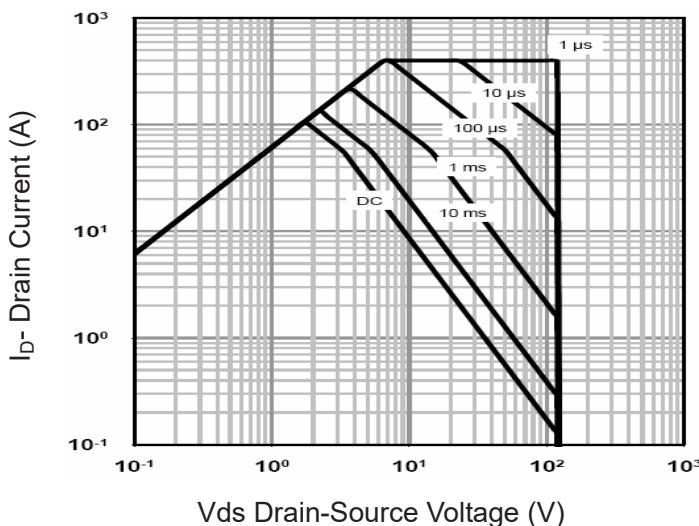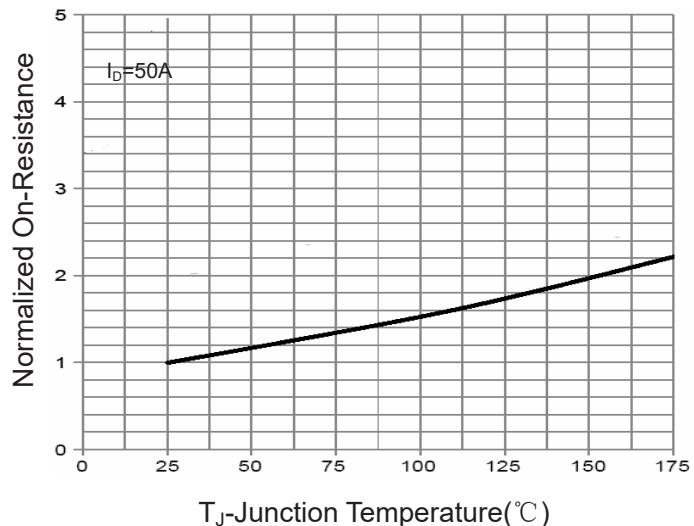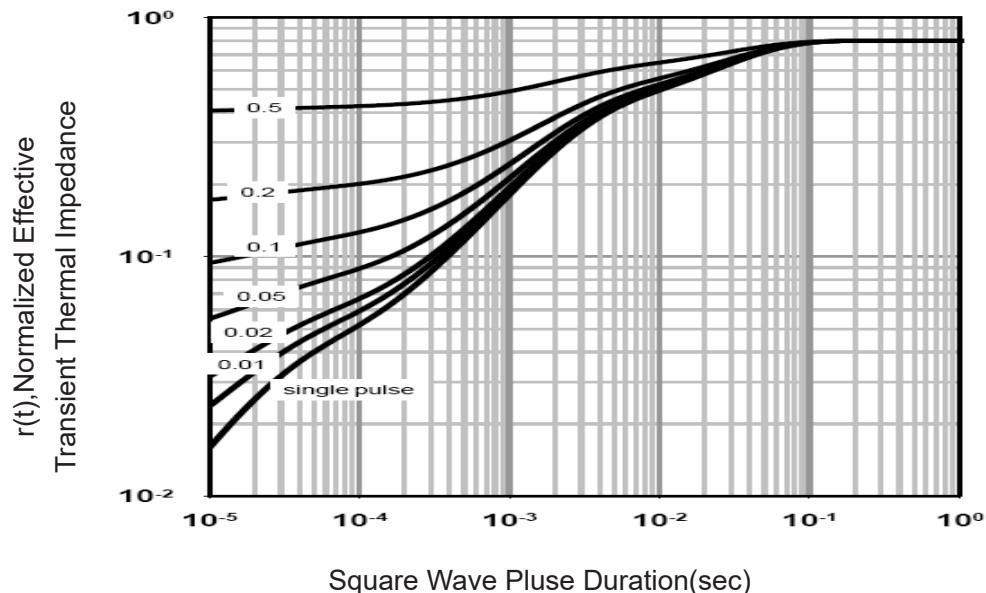
**Figure 7 Power De-rating**

**Figure 9 Current De-rating**

**Figure 8 Safe Operation Area**

**Figure 10 Rdson-Junction Temperature**

**Figure 11 Normalized Maximum Transient Thermal Impedance**