


SCHOTTKY DIODES

Features

- ◆ Low forward voltage drop
- ◆ Guard ring construction for transient protection
- ◆ High conductance
- ◆ Also available in lead free version

SOD-123

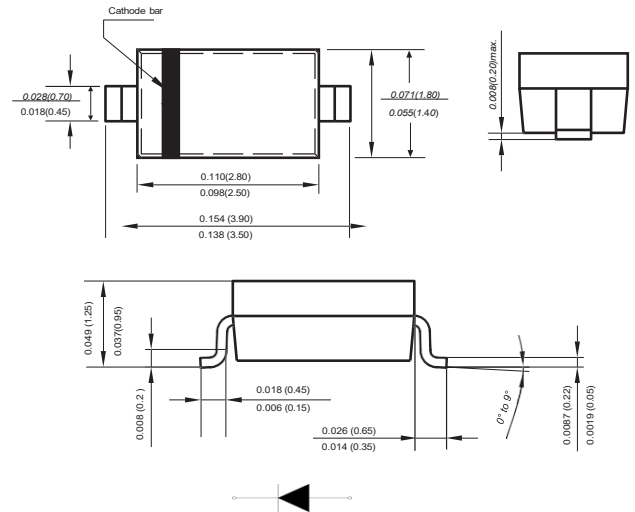

Dimensions in inches and (millimeters)

Parameter	Symbols	B0520W	B0530W	B0540W	Units
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	20	30	40	V
Maximum RMS voltage	V_{RMS}	14	21	28	V
Average rectified output current	I_o	0.5			A
Voltage rate of change	dv/dt	1000			v/us
Non-reptitive Peak Forward Surge Current at 8.3ms	I_{FSM}	15			A
Power dissipation	P_d	410			mW
Typical Thermal Resistance ⁽¹⁾	$R_{\theta JA}$	200			°C/W
Operating and Storage Temperature Range	T_j, T_{stg}	-55 ~ +150			°C

(1) P.C.B. mounted with 2.0" X 2.0" (5 X 5 cm) copper pad areas.

Characteristics at Ta= 25 °C

Parameter	Symbols	B0520W	B0530W	B0540W	Units
Reverse Breakdown Voltage at I_R at 250uA at 130uA at 20uA	$V_{(BR)R}$	20	30	40	V
Maximum Forward Voltage at I_F at 0.1A at 0.5A at 1A	V_F	0.330 0.390 —	0.375 0.430 —	— 0.510 0.620	V
Peak Reverse Current at V_R at 10V at 15V at 20V at 30V at 40V	I_R	75 — 250 — —	— 20 — 130 —	— — 10 — 20	uA
Typical Junction Capacitance	C_j	170			pF
Reverse recovery time $I_F=I_R=10mA, I_{rr}=0.1X I_R, R_L=100\Omega$	t_{rr}	4			ns

Typical Characteristics

Fig.1 Forward Current Derating Curve

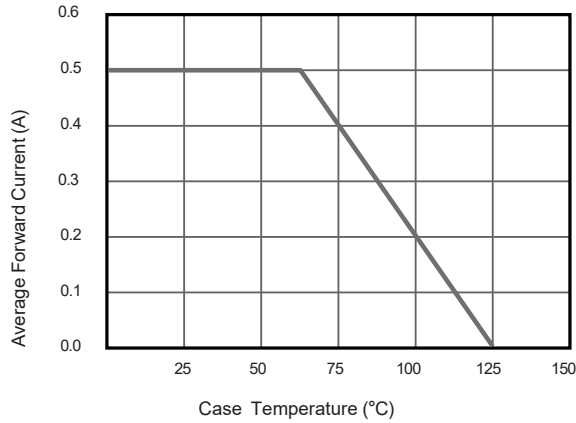


Fig.2 Typical Reverse Characteristics

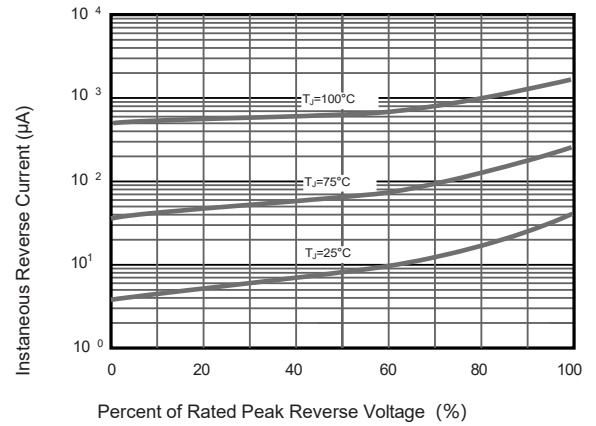


Fig.3 TYPICAL FORWARD VOLTAGE

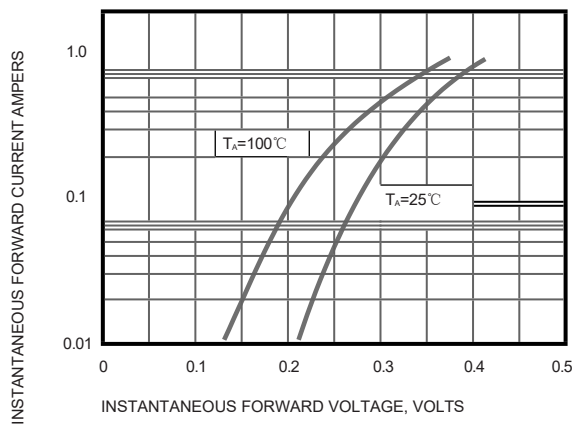


Fig.4 Typical Junction Capacitance

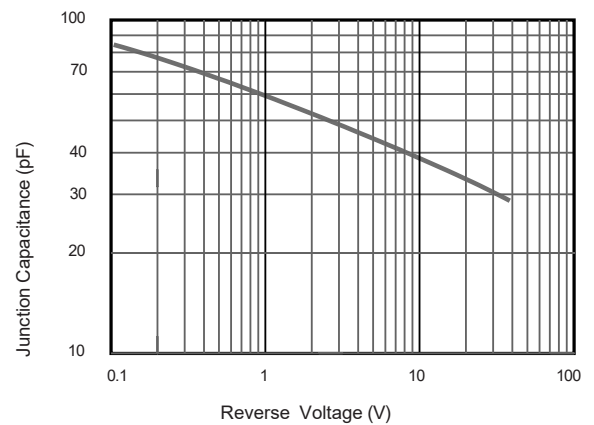


Fig.5 Maximum Non-Repetitive Peak Forward Surge Current



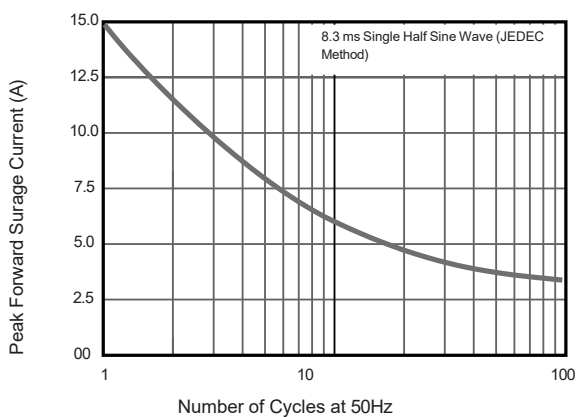


Fig.6 Typical Transient Thermal Impedance

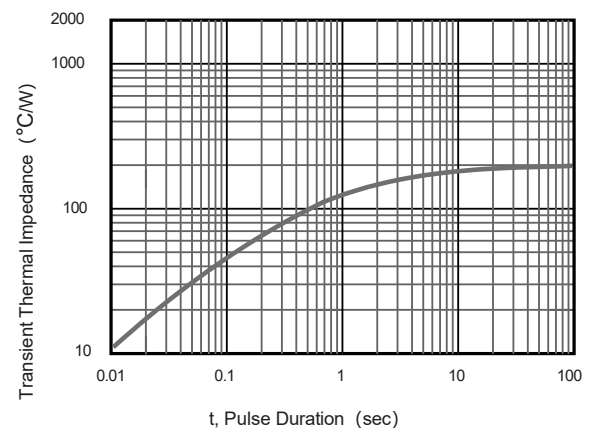

The curve above is for reference only.

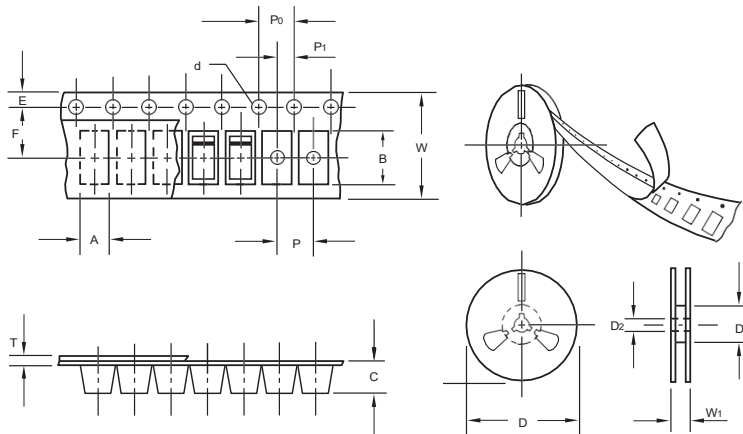

unit:mm


Item	Symbol	Tolerance	SOD-123
Carrier width	A	0.1	2.1
Carrier length	B	0.1	4.0
Carrier depth	C	0.1	1.60
Sprocket hole	d	0.05	1.55
7" Reel outside diameter	D	2.0	178.00
7" Reel inner diameter	D ₁	min	50.0
Feed hole diameter	D ₂	0.5	13.00
Sprocket hole position	E	0.1	1.75
Punch hole position	F	0.1	3.50
Punch hole pitch	P	0.1	4.00
Sprocket hole pitch	P ₀	0.1	4.00
Embossment center	P ₁	0.1	2.00
Overall tape thickness	T	0.1	0.25
Tape width	W	0.3	8.15
Reel width	W ₁	1.0	10.5

Note: Devices are packed in accordance with EIA standard RS-481-A and specifications listed above.

Reel packing

PACKAGE	REEL SIZE	REEL (pcs)	COMPONENT SPACING (m/m)	BOX (pcs)	INNER BOX (m/m)	REEL DIA, (m/m)	CARTON SIZE (m/m)	CARTON (pcs)	APPROX. GROSS WEIGHT (kg)
SOD-123	7"	3,000	4.0	45,000	190*190*190	178	400*400*220	180,000	9.0

Suggested Pad Layout

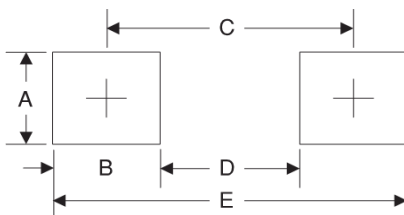

Symbol	Unit (mm)	Unit (inch)
A	1.2	0.047
B	1.2	0.047
C	3.2	0.126
D	2.0	0.079
E	4.4	0.173

Important Notice and Disclaimer

Microdiode Semiconductor(Shenzhen) reserves the right to make changes to this document and its products and specifications at any time without notice. Customers should obtain and confirm the latest product information and specifications before final design, purchase or use.

Microdiode Semiconductor(Shenzhen) makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Microdiode Semiconductor(Shenzhen) assume any liability for application assistance or customer product design. Microdiode Semiconductor(Shenzhen) does not warrant or accept any liability with products which are purchased or used for any unintended or unauthorized application.

No license is granted by implication or otherwise under any intellectual property rights of Microdiode Semiconductor(Shenzhen).

Microdiode Semiconductor(Shenzhen) products are not authorized for use as critical components in life support devices or systems without express written approval of Microdiode Semiconductor(Shenzhen).

