


SURFACE MOUNT SUPER FAST RECOVERY RECTIFIER

Features

- ◆ The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- ◆ For surface mounted applications
- ◆ Low reverse leakage
- ◆ Built-in strain relief, ideal for automated placement
- ◆ High forward surge current capability
- ◆ High temperature soldering guaranteed:
- ◆ 260°C/10 seconds at terminals
- ◆ Glass passivated chip junction

SMAF

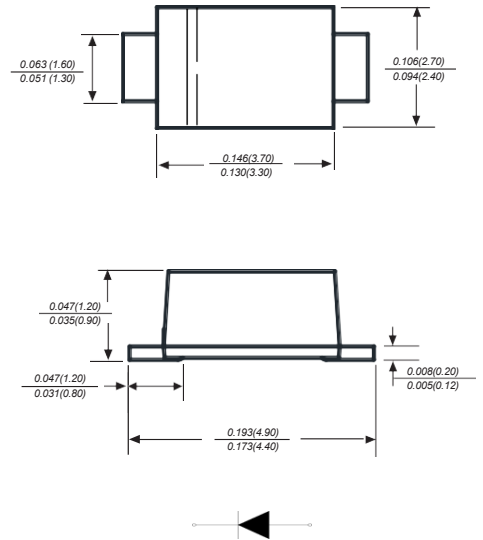

Dimensions in inches and (millimeters)

Maximum Ratings And Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.


Parameter	SYMBOLS	ES3AF	ES3BF	ES3CF	ES3DF	ES3EF	ES3GF	ES3JF	UNITS
Marking Code									
Maximum repetitive peak reverse voltage	V _{RRM}	50	100	150	200	300	400	600	V
Maximum RMS voltage	V _{RMS}	35	70	105	140	210	280	420	V
Maximum DC blocking voltage	V _{DC}	50	100	150	200	300	400	600	V
Maximum average forward rectified current at TL=55°C	I <sub(av)< sub=""></sub(av)<>	3.0							A
Peak forward surge current 8.3ms single half sine-wave superimposed onrated load (JEDEC Method)	I _{FSM}	50							A
Maximum instantaneous forward voltage at 3.0A	V _F	0.95				1.25		1.7	V
Maximum DC reverse current TA=25°C at rated DCblocking voltage TA=125°C	I _R	5.0 200							uA
Maximum reverse recovery time (NOTE 1)	t _{rr}	35							ns
Typical junction capacitance (NOTE 2)	C _J	60.0							pF
Typical thermal resistance (NOTE 3)	R _{θJA}	40.0							°C/W
Operating junction and storage temperature range	T _J ,T _{STG}	-50 to+150							°C

Note: 1. Reverse recovery condition $I_F=0.5\text{A}$, $I_R=1.0\text{A}$, $t_{rr}=0.25\text{A}$

2. Measured at 1MHz and applied reverse voltage of 4.0V D.C.

3. P.C.B. mounted with 0.2x0.2" (5.0x5.0mm) copper pad areas

Ratings And Characteristic Curves

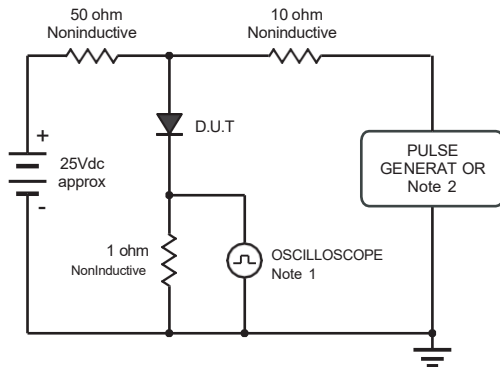

Note: 1. Rise Time = 7ns, max.
Input Impedance = 1megohm, 22pF.
2. Rise Time = 10ns, max.
Source Impedance = 50 ohms.

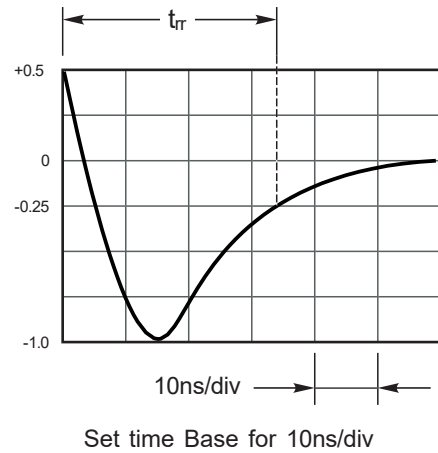


Fig.2 Maximum Average Forward Current Rating

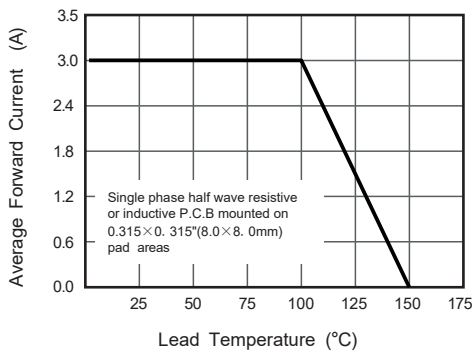


Fig.3 Typical Reverse Characteristics

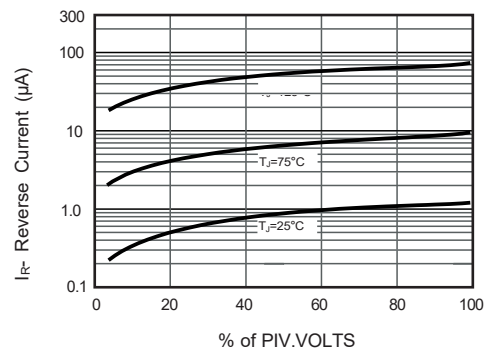


Fig.4 Typical Forward Characteristics


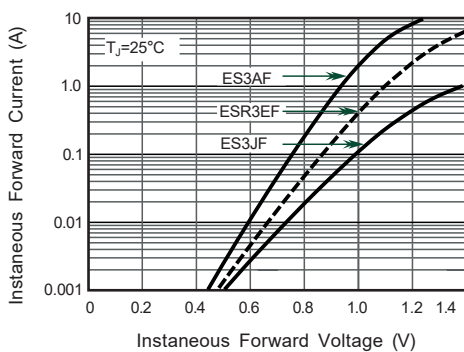


Fig.5 Typical Junction Capacitance

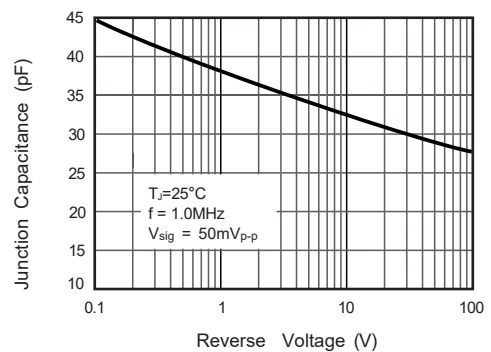

The curve above is for reference only.